

Rocker Switch

SPDT


On - None - On

On - None - (On)


~~On - Off - On~~

35-602
35-603
35-604 

RoHS CERTIFIED

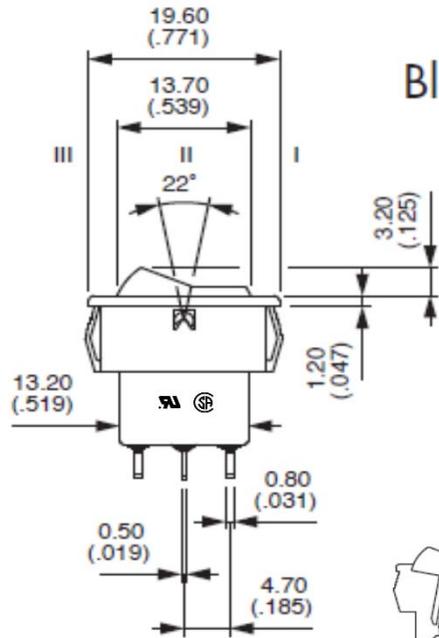


Black body

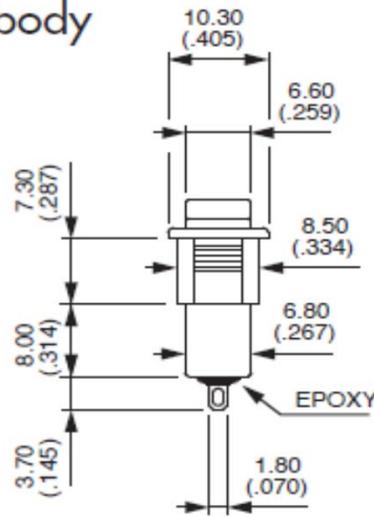


4A at 125VAC
2A at 250VAC

PANEL CUT-OUT



Solder lug terminals.



Silver Contacts
Operating temperature : -40°C to +85°C
Electrical life : 50.000 cycles
Insulation resistance : 10.000 MΩ min.
Initial contact resistance : 10 mΩ max.

Harmonized Tariff Cd: 8536.50.9065

