

Rocker Switches

SPST



On-None-Off

35-642


Snap-in

10 AMPS @ 125 V AC

5 AMPS @ 250 V AC

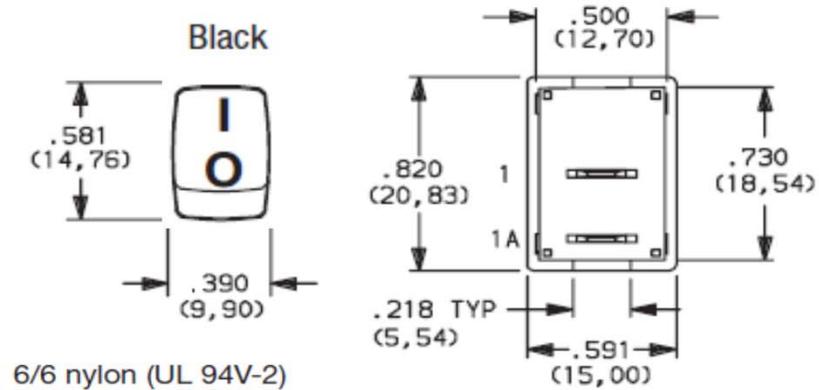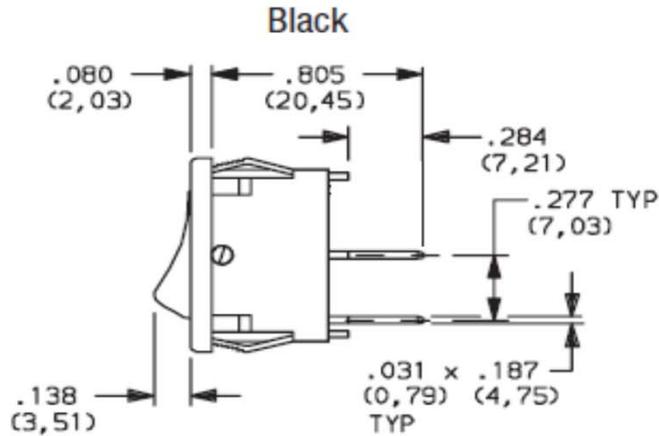

Quick connect

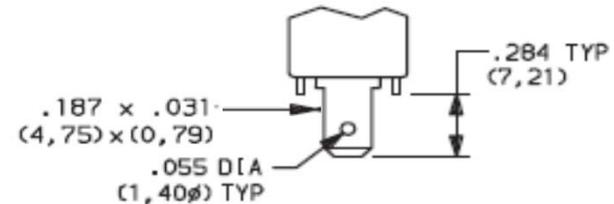


ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
 INSULATION RESISTANCE: $10^9 \Omega$ min.
 DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
 OPERATING TEMPERATURE: -30°C to +65°C

PANEL MOUNTING

D502J12S215PQA

PANEL THICKNESS	DIM 'A' SP & DP MODELS
.030-.049 (0,76) (1,24)	.756 (19,20)
.049-.079 (1,24) (2,01)	.764 (19,41)
.079-.118 (2,01) (3,00)	.780 (19,81)



UPC: 010151548405
 HTS : 8536509065
 CoO: CN

