

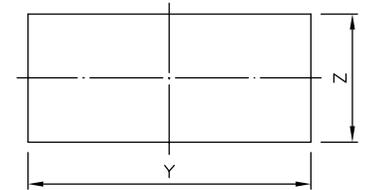


RATING : 16A 125VAC, 10A 250VAC(UL, CUL) .
 CIRCUIT : ON - OFF , (DPST) .
 INSULATION RESISTANCE: DC 500V 100MΩ OR MORE .
 CONTACT RESISTANCE : DC 2-4V 1A 20mΩ OR LESS .
 WITHSTAND VOLTAGE : AC 1500V 1 Min .
 COLOR : KNOB - BLACK
 BODY - BLACK

UL NO : E68037
 C-UL NO : E68037

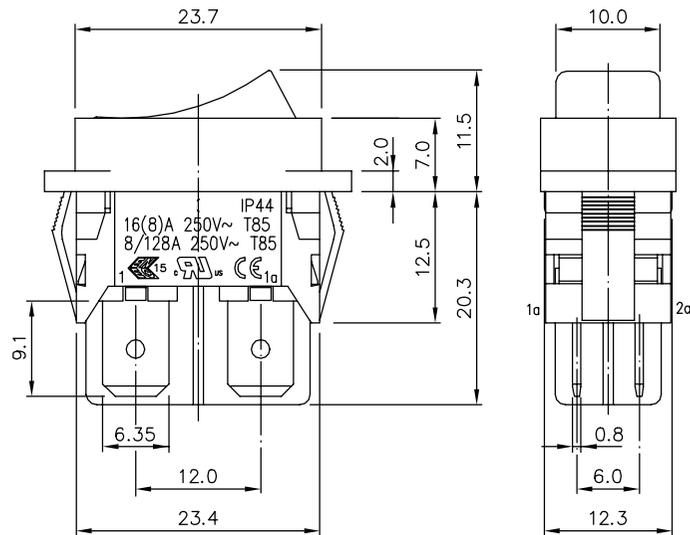


PANEL CUT-OUTS

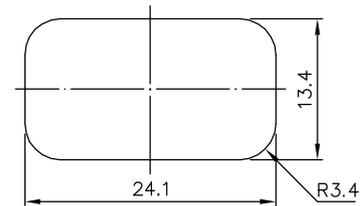

FACIA

X	Y	Z
0.8~1.3	26.2 ^{+0.1} ₀	12.2 ^{+0.1}
1.3~2.0	26.4 ^{+0.1} ₀	12.2 ^{+0.1}
2.0~3.0	26.8 ^{+0.1} ₀	12.2 ^{+0.1}

X= PANEL THICKNESS
 SUB-PANEL

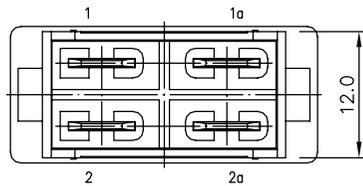

		MATERIAL			
		±0.5 ^m	m/m	2:1	
		ROCKER SWITCH			
		35-643			

14|05|15