
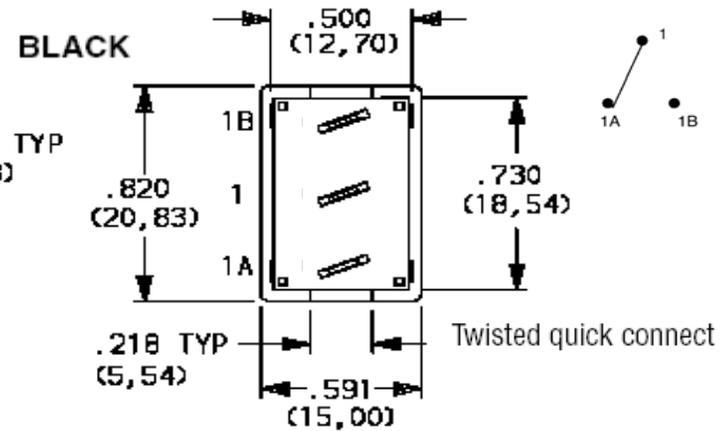



SPDT, On-None-On

RoHS: CERTIFIED

35-644

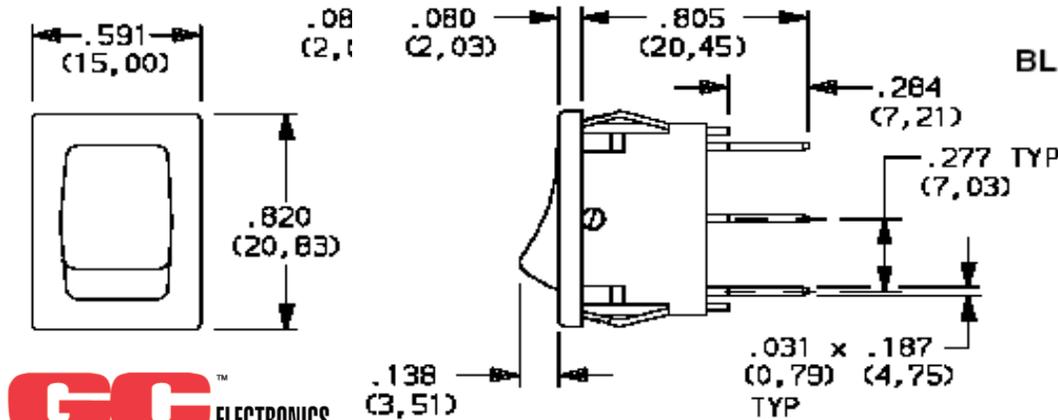

ACTUATOR SHOWN IN POSITION 1

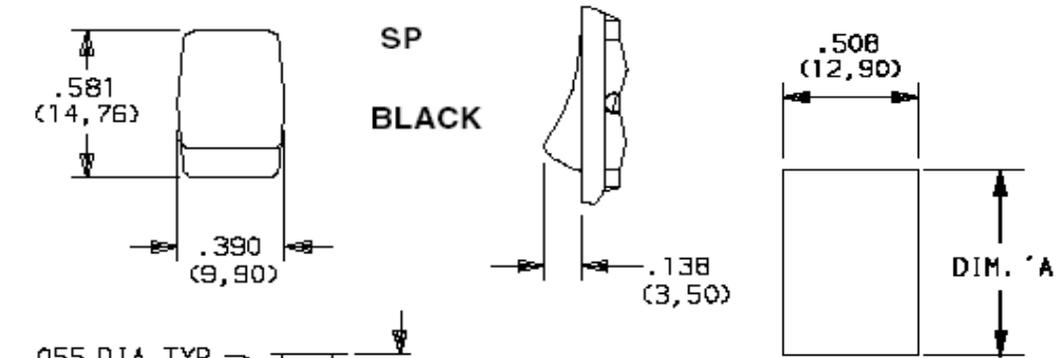

Materials
 ACTUATOR & HOUSING: 6/6 nylon (UL 94V-2), color black, finish: matte.
 MOVABLE CONTACTS: Coin silver, silver plated.
 STATIONARY CONTACTS AND TERMINALS: Copper or brass, silver plated.
 CONTACT SPRING: Music wire or stainless steel.
 OPERATING TEMPERATURE: -30°C to +65°C

PANEL THICKNESS	DIM 'A'
.030-.049 (0,76) (1,24)	.756 (19,20)
.049-.079 (1,24) (2,01)	.764 (19,41)
.079-.118 (2,01) (3,00)	.780 (19,81)

Specifications
 CONTACT RATING: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC.
 ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
 INSULATION RESISTANCE: 10⁹ Ω min.
 DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.

UPC: 010151543837 CoO: China HTS: 8536.50.9065