



LIGHTED Rocker

125V neon

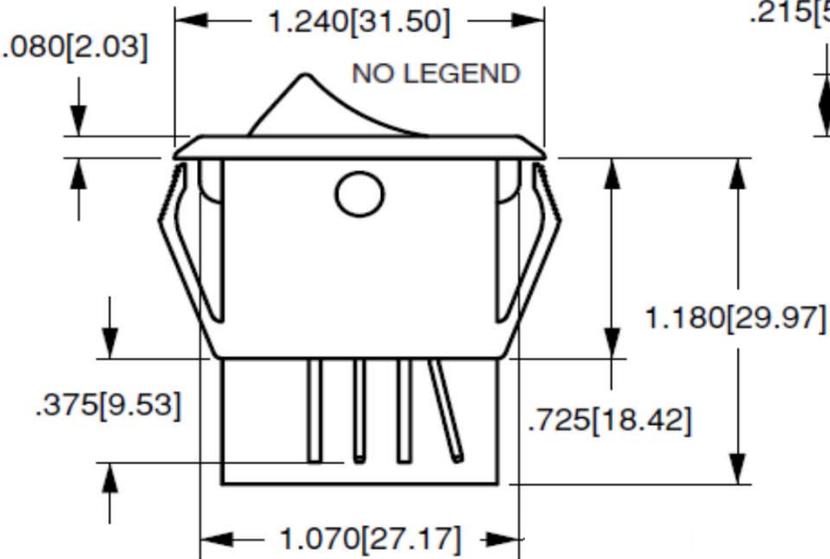

DPST



Standard Base
OFF-NONE ON

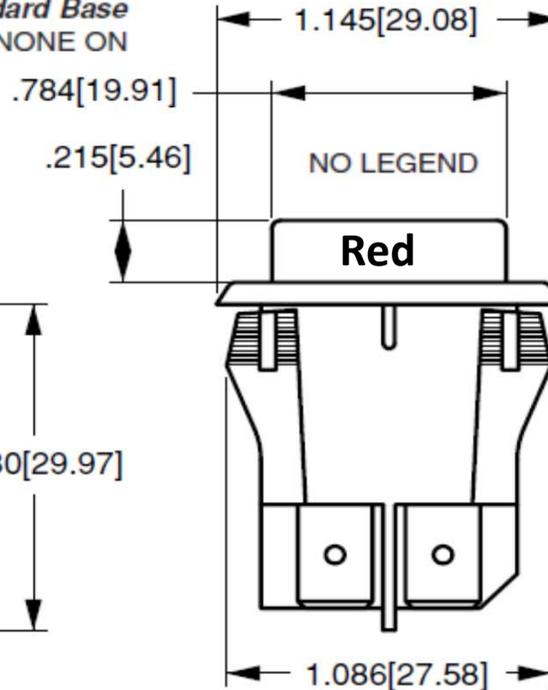

35-655

20A 125VAC
15A 250VAC
3/4 HP 125-250 VAC

125V neon

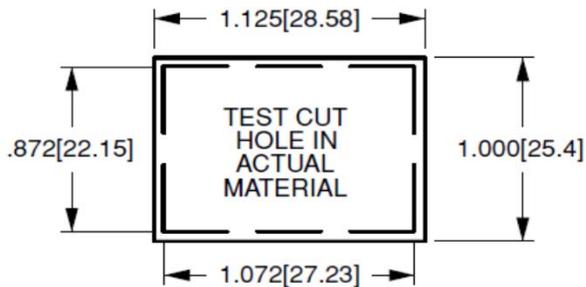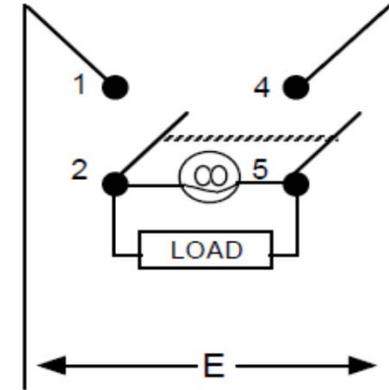

.250 TAB (Q.C.)

.250[6.35]

MOUNTING HOLE

Panel Thickness: .025 min - .187 max.
Specific cutout dimension range dependent on panel thickness and material.



LRGSK611-R-S-B-0/125N

RoHS CERTIFIED

MOUNTING HOLE