

**LIGHTED** **Rocker**  
SMOOTH CURVED NYLON **AMBER**




**SPST**  
On-None-Off

RoHS CERTIFIED

# 35-656

UL, CSA


**Black**

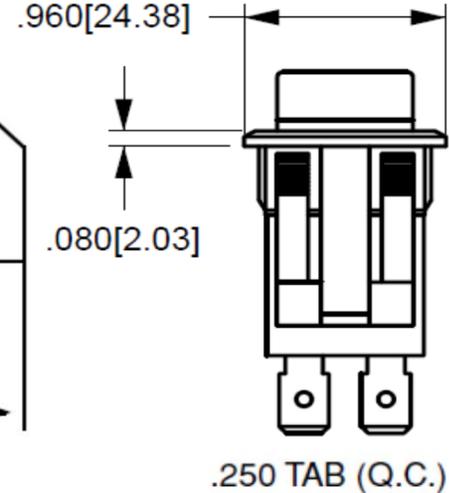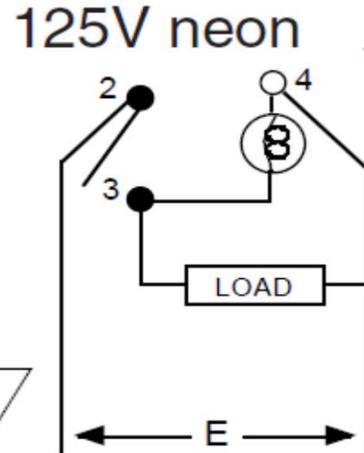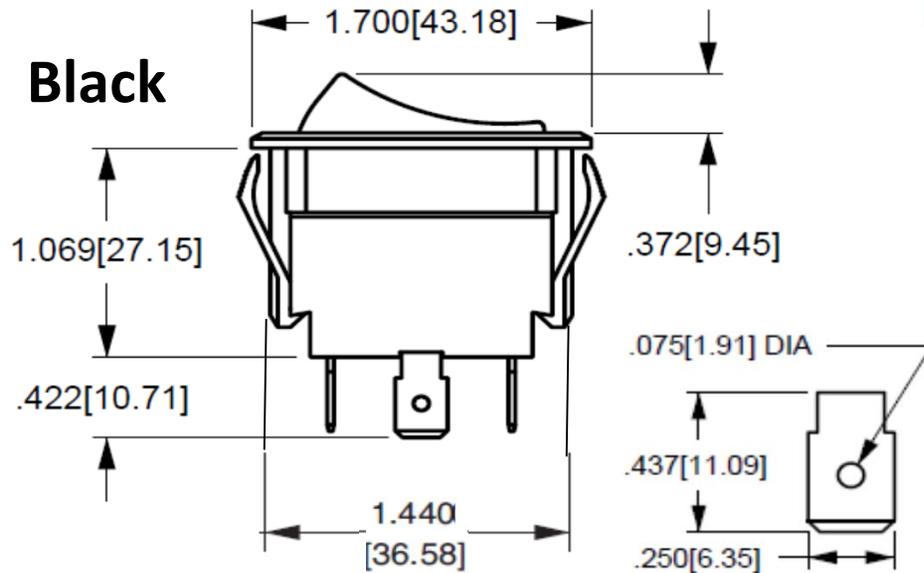


**15A 125VAC**  
**10A 250VAC**  
**1/2 HP 125-250 VAC**  
**15A 15-28VDC**

NO LEGEND

**Actuator Style:**

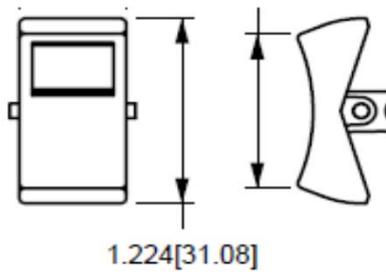

**MOUNTING HOLE**  
(Nylon Snap-in Brackets)  
Panel Thickness:  
.040 min. - .250 max.

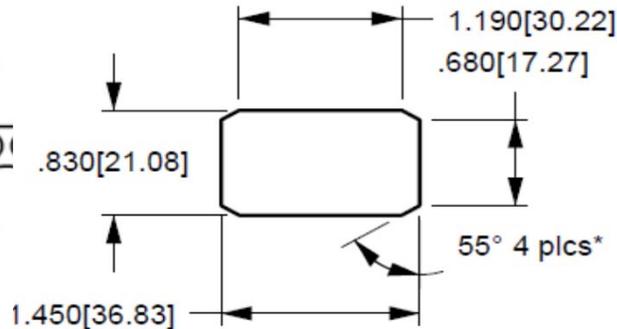

UPC: 010151547330  
HTS USA: 8536509065  
CoO: MX



LTILA51-6S-BL-AM-NBL/125N