



Rocker SPST On/Off LIGHTED RED LENS-SNAP-IN 30Vdc

**35-660**

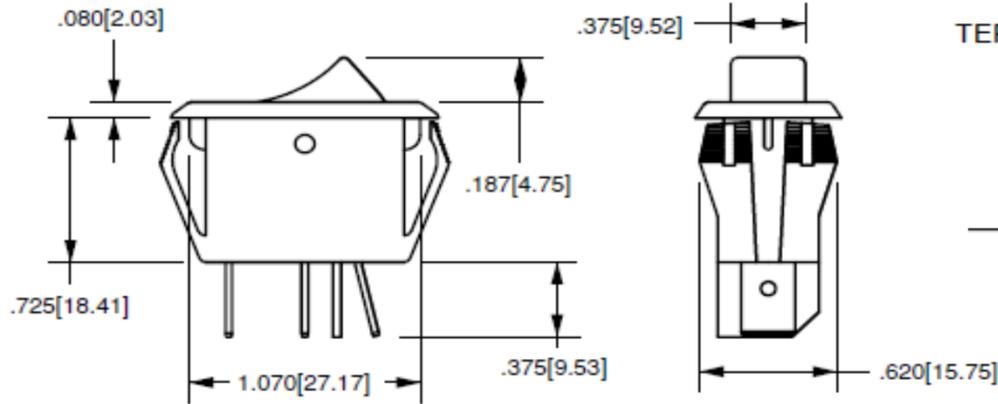

TERMINAL TYPE





**SPST**  
**OFF-NONE-ON**

**10A 30V**

LOW VOLTAGE FOR  
12 VOLT LAMPS

12 volts incandescent

**MOUNTING HOLE**  
Panel Thickness: .025 min. - .187 max.  
Specific cutout dimension range  
dependent on panel thickness and material.

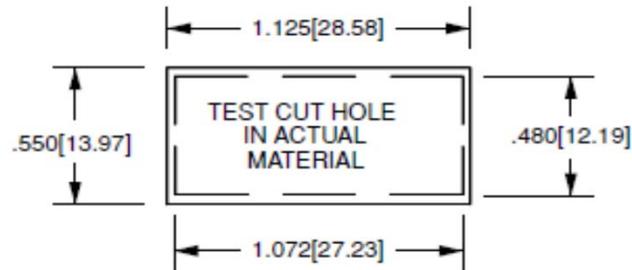

<b>Mounting Hole Dimensions</b>	.480" x 1.072"; 12.19mm x 27.23mm
<b>Mounting Method</b>	Snap-In
<b>Dielectric Strength</b>	1,000 V RMS (minimum)
<b>Insulation Resistance</b>	100 megohms (minimum)
<b>Base Material</b>	Nylon
<b>Electrical Life</b>	100,000 cycles
<b>Mechanical Life</b>	100,000 cycles
<b>Operating Temperature</b>	32°F to 185°F (0°C to 85°C)
<b>Actuator Material</b>	Polycarbonate or Translucent Nylon

**RED**

**ACTUATOR STYLE** Rocker Clear  
Bezel Black Standard  
UL, CSA, VDE  
LOW VOLTAGE FOR 12 VOLT LAMPS

UPC: 010151543882  
HTS: 8536509065  
CoO: MX

