




# LIGHTED APPLIANCE ROCKERS

12V INCANDESCENT Lighted Amber

35-662

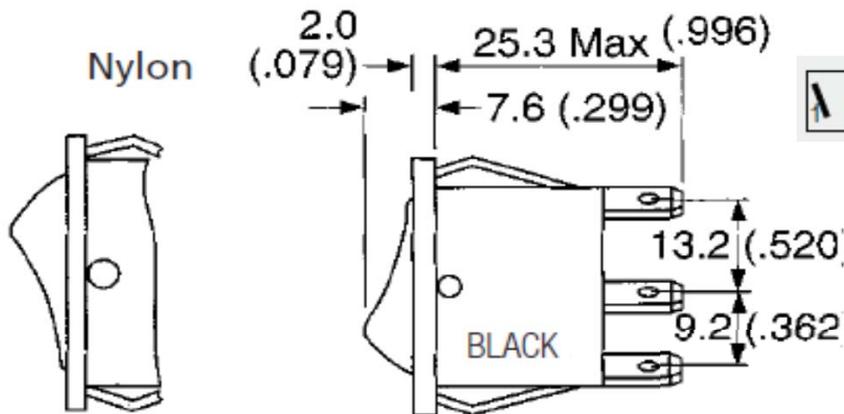


Panel Thickness .75-2.5 (.029-.098)

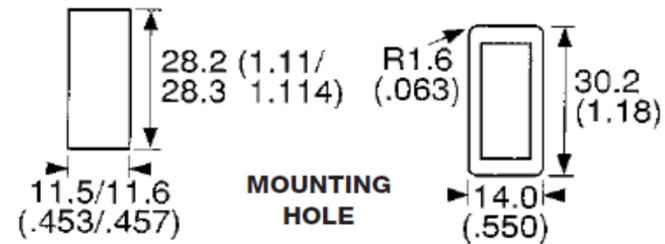


**LAMP VOLTAGE**  
12V Incandes.


Q.C. (.250")

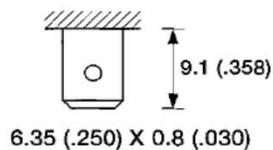

ON - OFF  
Lit  
Switched neutral

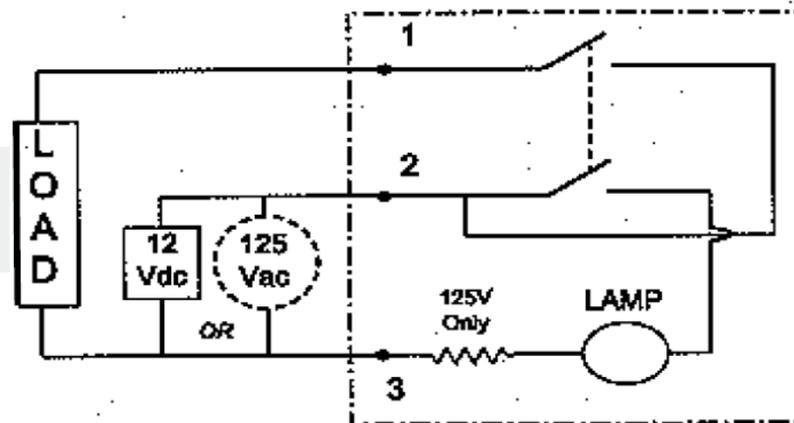

Lighted Amber

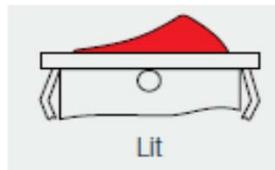

**GC** ELECTRONICS

| CIRCUIT FUNCTION | POLES & THROWS | AMPS    | AMPS    | H.P.    | H.P.    |
|------------------|----------------|---------|---------|---------|---------|
|                  |                | 125 VAC | 250 VAC | 125 VAC | 250 VAC |
| ON               | OFF            | 15      | 15      | 1/2     | 1       |