



# LIGHTED APPLIANCE ROCKERS

Lighted Green

35-664


12V INCANDESCENT

Panel Thickness .75-2.5 (.029-.098)

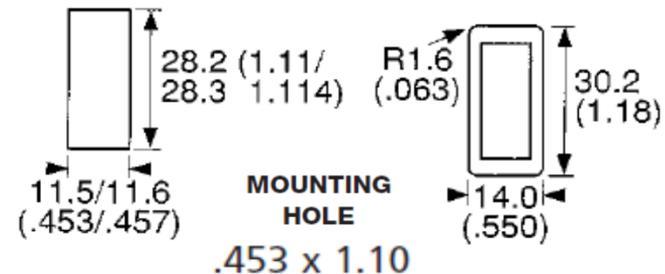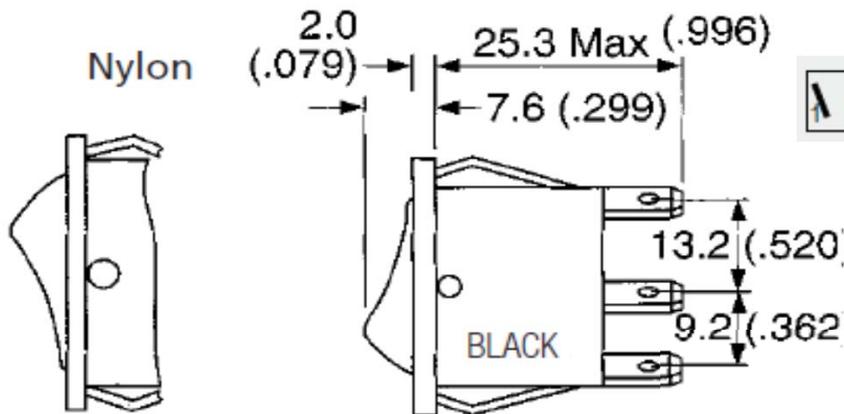


**LAMP VOLTAGE**  
12V Incandes.


Q.C. (.250")



ON - OFF  
Lit  
Switched neutral

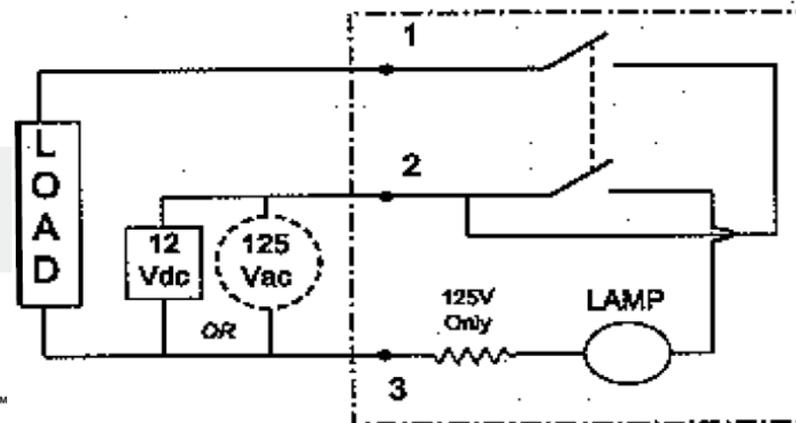

Lighted Green



**GC**™  
**ELECTRONICS**

CIRCUIT FUNCTION	POLES & THROWS	AMPS	AMPS	H.P.	H.P.
		125 VAC	250 VAC	125 VAC	250 VAC
ON	OFF	15	15	1/2	1