


Lit Rocker Switches

SPST

On / Off

Orange	# 35-680
Green	# 35-681
Red	# 35-682

RoHS compliant

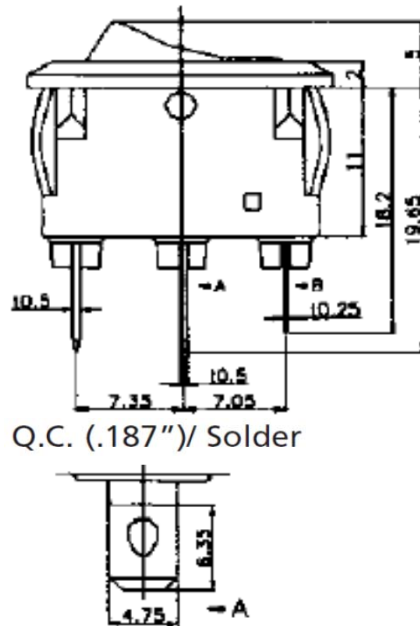




5A @ 125Vac, 3A @ 250Vac

NOTE: A resistor is required in series with pilot lamp for use on DC. Diode is also required for AC use.

Contact resistance: Under 30m Ω

Insulation Resistance: Over 100M Ω at 500V DC

Dielectric withstanding voltage: 1minute at 2000V AC

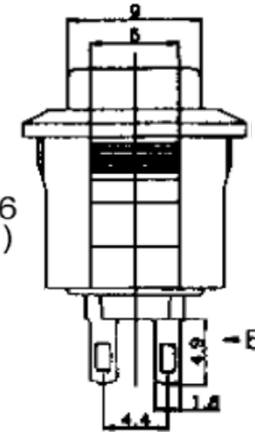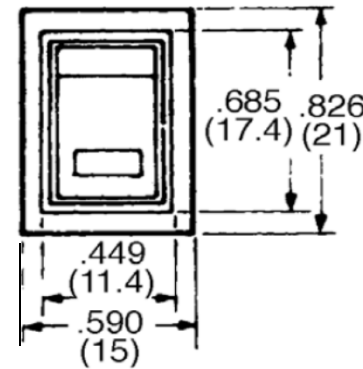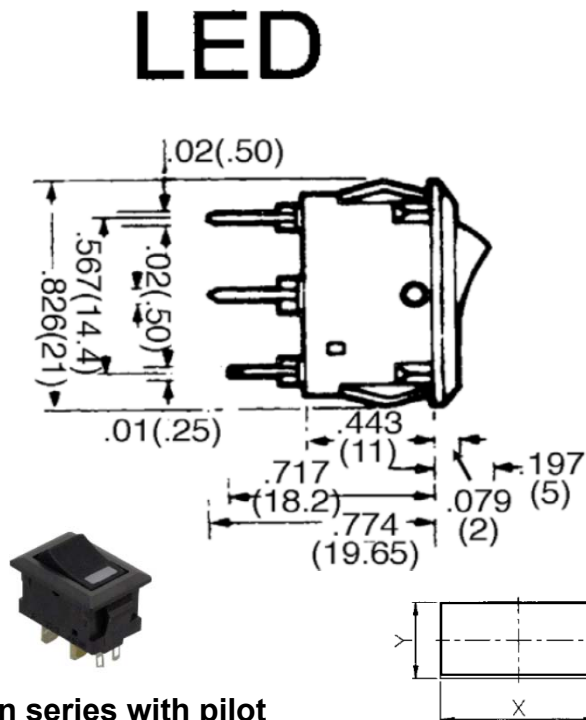

Thickness of mounting board	X	Y
0.75~1.25	19.2 ⁺⁰ _{-.1}	12.9 ^{+0.1} _{-.0}
1.25~2.0	19.4 ⁺⁰ _{-.1}	12.9 ^{+0.1} _{-.0}

Mounting Hole
.507" X .75"

