


# Lit Rocker Switches

## SPST


On/Off

Orange	# 35-680
Green	# 35-681
Red	# 35-682

RoHS compliant

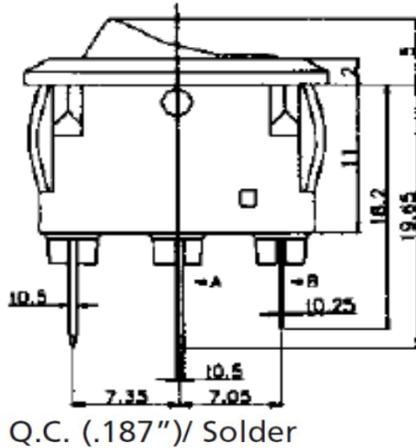





Q.C. (.187")/ Solder



5A @ 125Vac, 3A @ 250Vac



## LED

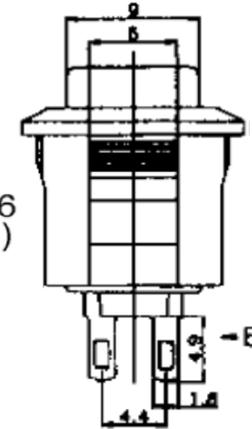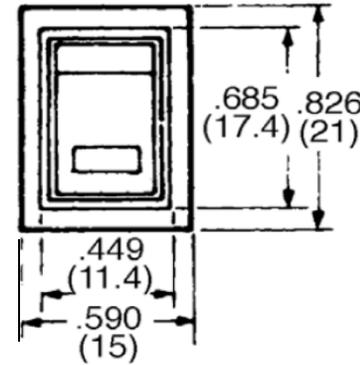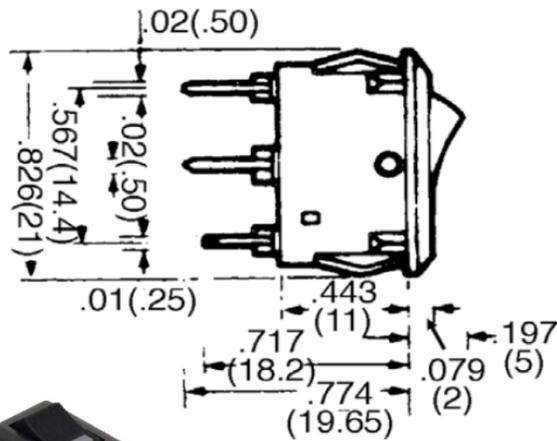

Thickness of mounting board	X	Y
0.75~1.25	19.2 <sup>+0</sup> <sub>-.1</sub>	12.9 <sup>+0.1</sup> <sub>-0</sub>
1.25~2.0	19.4 <sup>+0</sup> <sub>-.1</sub>	12.9 <sup>+0.1</sup> <sub>-0</sub>

Mounting Hole  
.507" X .75"



Contact resistance: Under 30m Ω

Insulation Resistance: Over 100M Ω at 500V DC

Dielectric withstanding voltage: 1minute at 2000V AC