


ROCKER LIGHTED APPLIANCE

35-684


On-Off Circuit Function

10A @ 125 Vac

RoHS CERTIFIED

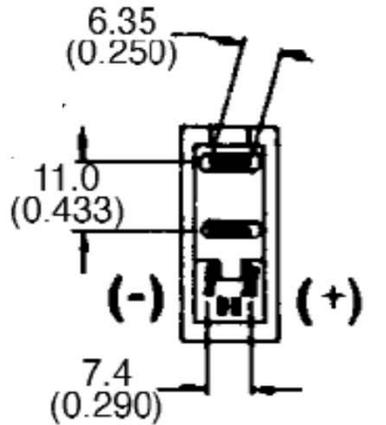


LAMP TERMINAL

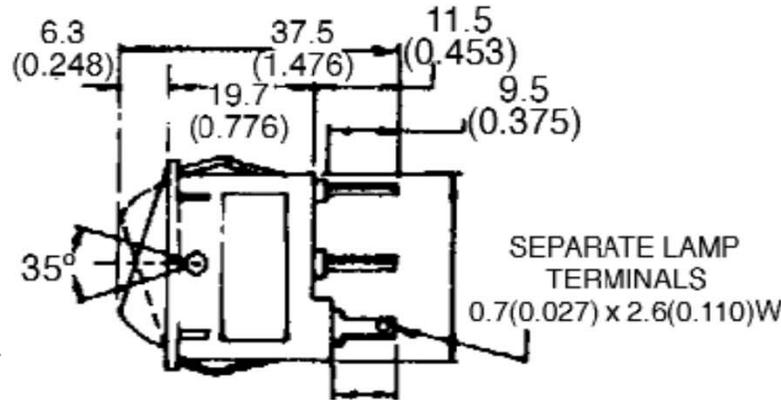

SPST

Requires external resistor diode for AC applications

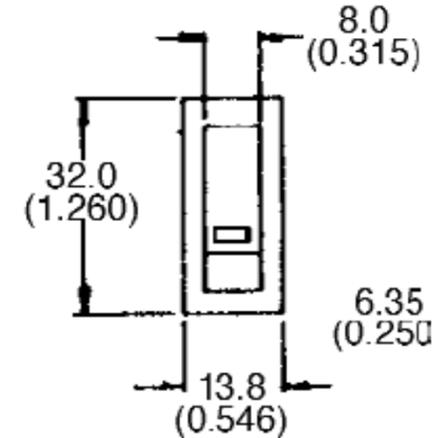


Mounting Hole: 0.430 x 1.189

White w/ Red LED

Must use resistor in series with L.E.D. See Chart Below:

V.D.C.	RΩ	Watts (min)
3	33	1/4
5	100	1/4
9	220	1/4
12	330	1/2
24	820	1.0
117	3800	5.0



PANEL CUTOUT



DS-413

UPC: 010151544087
HTS: 8536.50.9065
CoO: JP

