

# Rocker Switch

SNAP-IN

# SPST

On-None-Off



Red

Translucent  
Lighted


# 35-689

RoHS CERTIFIED





125 VOLT/ NEON

Mounting Hole: (.550 x 1.125)"  
(13.97 x 28.57)mm

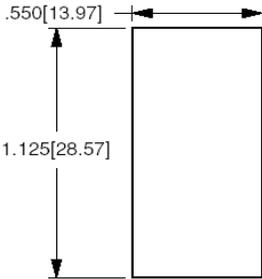

MOUNTING HOLE  
Panel Thickness:  
.020 [.508] min. to  
.250 [6.35] max.

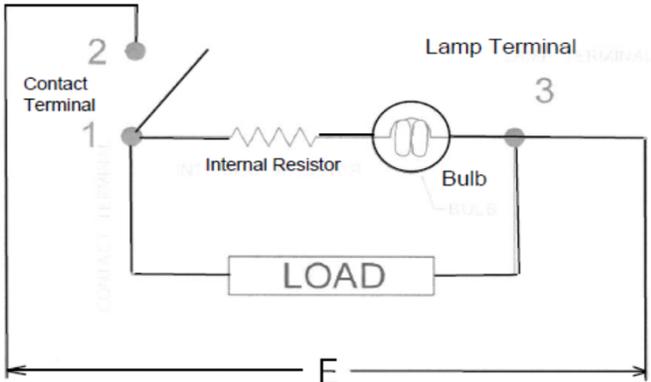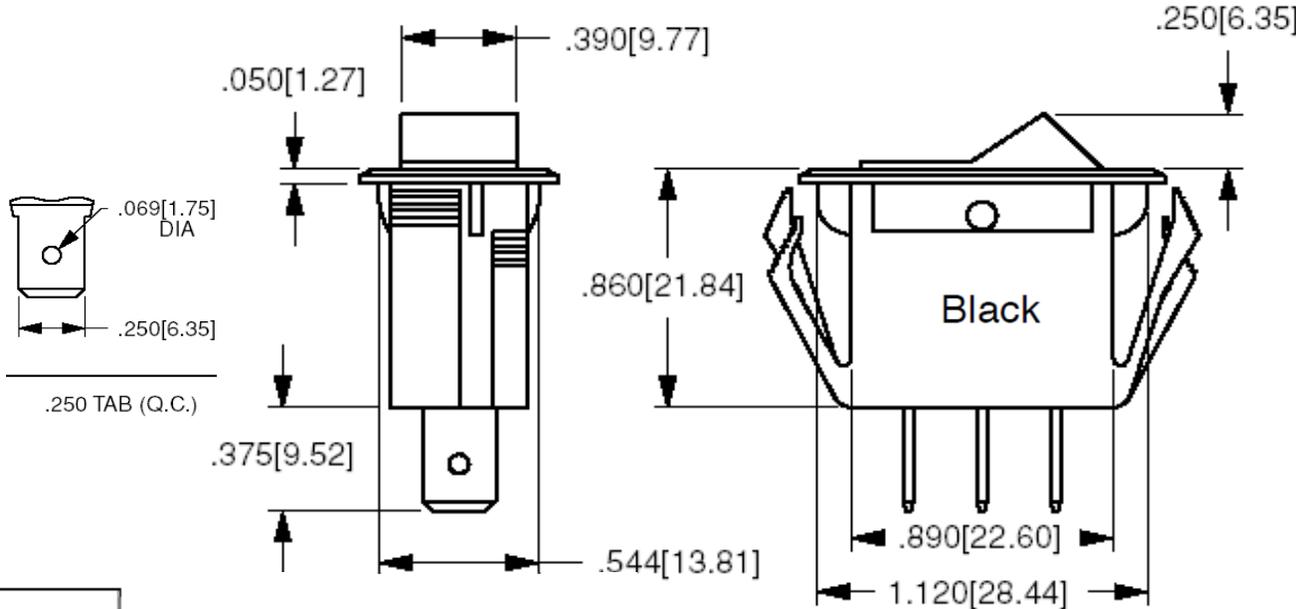

**15A 125VAC**  
**10A 250VAC**

125V neon

additional 20A 125-250VAC Heater rating

Electrical Life: 100,000 cycles  
Mechanical Life : 100,000 cycles  
Operating Temperature: (32 to 185)°F  
(0 to 85)°C

Dielectric Strength: 1,000 Vrms min.  
Insulation Resistance: 100 megohms min.

UPC: 010151544124  
HTS: 8536.50.9065  
CoO: Mexico

