
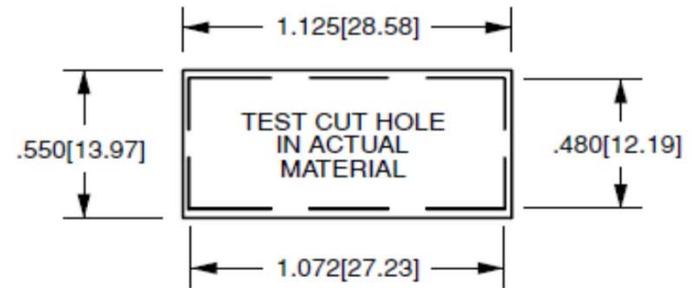


Miniature Rocker Switches SPST

Single Pole

35-693

OFF-NONE-ON

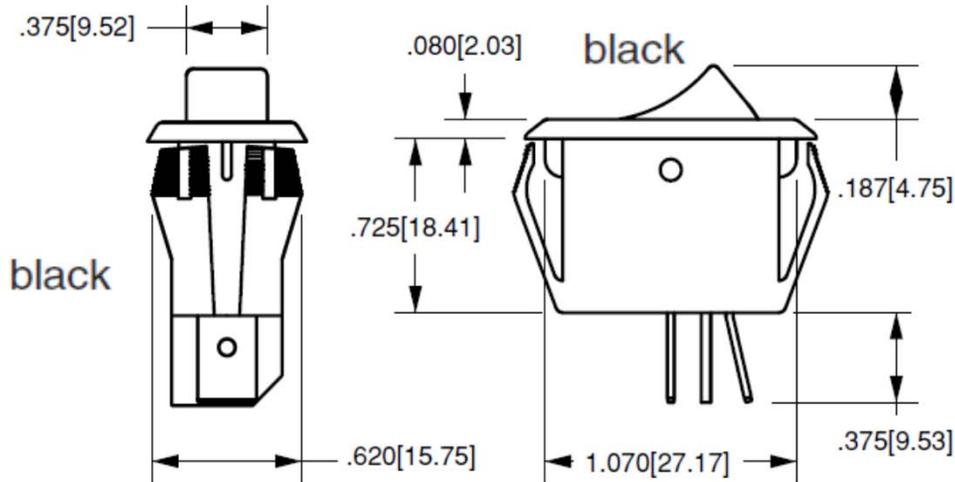

(2 color) visi-rocker

Dielectric Strength

UL/CSA:

1000V - live to dead metal parts

VDE:

4000V - live to dead metal parts;

750V - across open contacts

Electrical Life


100,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)




10A 250 VAC

16A 125 VAC

OFF-ON vertical

black



visi-red



UPC: 010151547361

HTS USA: 8536509065

CoO: MX