


**SPST
ON-NONE-OFF**




NO LEGEND

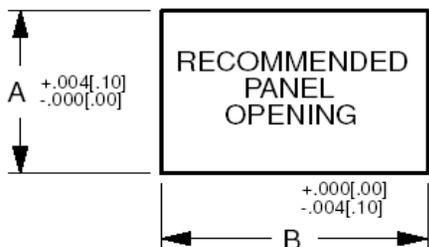

| PANEL THICKNESS | A | B |
|-----------------------|-------------|-------------|
| .030[.76]-.050[1.27] | .508[12.90] | .756[19.20] |
| .050[1.27]-.078[1.98] | .508[12.90] | .764[19.40] |
| .078[1.98]-.125[3.17] | .508[12.90] | .780[19.81] |

ILLUMINATED ROCKER

35-696

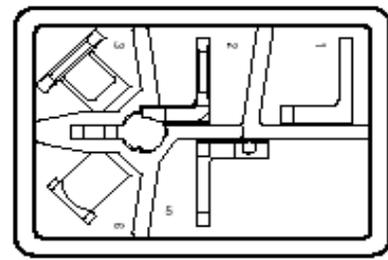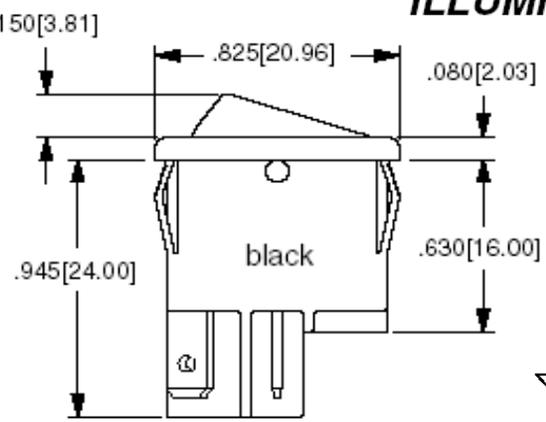

Lighted Red

Lamp Voltage: 125V Neon dependent lamp

| AMPS 125 VAC | AMPS 250 VAC | H.P. 125/250 VAC |
|--------------------|--------------------|------------------------|
| 12 | 8 | 1/2 |

Dielectric Strength

1000V - live to dead
metal parts & opposite polarity

Electrical Life


50,000 cycles

Mechanical Life

100,000 cycles

Operating Temperature

32°F to 185°F (0°C to 85°C)



UPC: 010151545923

HTS: 8536509065

CoO: MX

