


# 35-754

# PROXIMITY SWITCHES



0.3  
**AMPS**  
30VAC

3.0  
**WATTS**  
30VDC

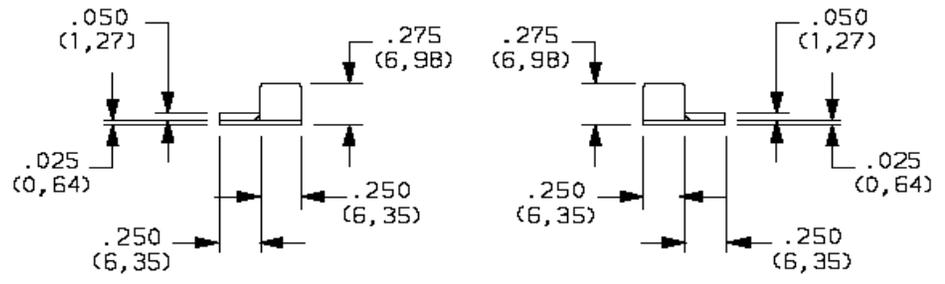


Wire Leads: UL 1061, 22AWG, stranded copper or aluminum-12" stripped/white

Release points are 110% to 150% of the operating points.


UPC: 010151430649

Subminiature surface mount (adhesive or flange), side exit leads, 1" make gap.

CoO: CN

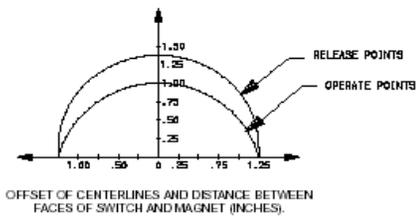

**Specifications:**  
 Initial Contact Resistance: 100 Milliohms (max.)  
 Dielectric Strength: 200 VDC  
 Temperature Rating: -40°C to 100°C  
 Electrical & Mech **Long life—4M operations**  
 CONTACT RESISTANCE: 100 m Ω max. initial.

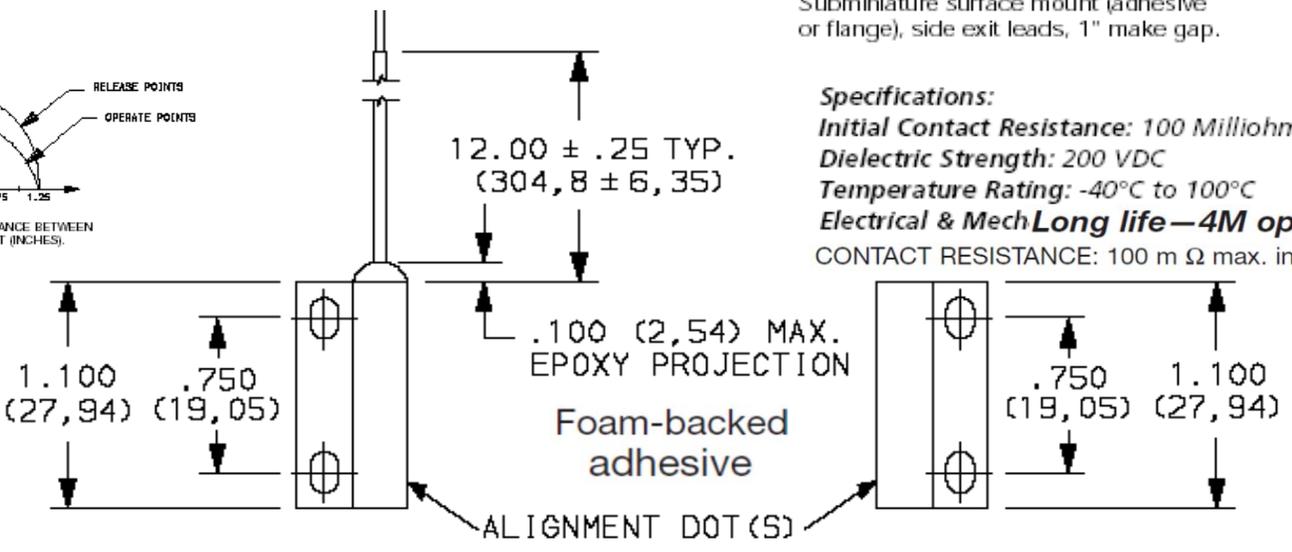

SPST  
Normally Open

Contacts are held closed (on) when magnet is within actuation range.

MAGNET: NdFeB