


REED-ALARM SW.

MOUNTING TYPE
Surface

GAP
1.18"



OPERATING GAP 3cm MAX.

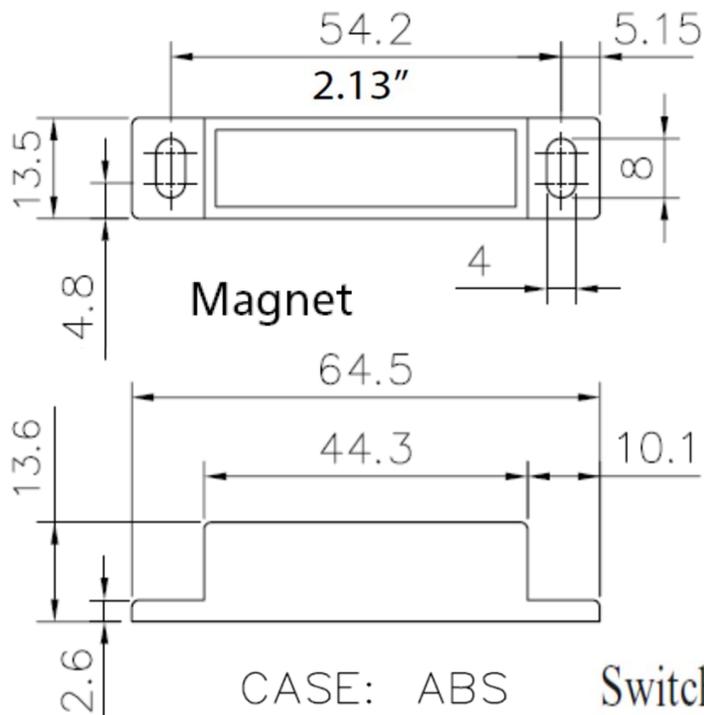


CASE: ABS

Contact Resistance
140 mΩ max

ELECTRICAL LIFE:
10,000,000 CYCLES

SPDT NO or NC

35-756
RoHS: CERTIFIED

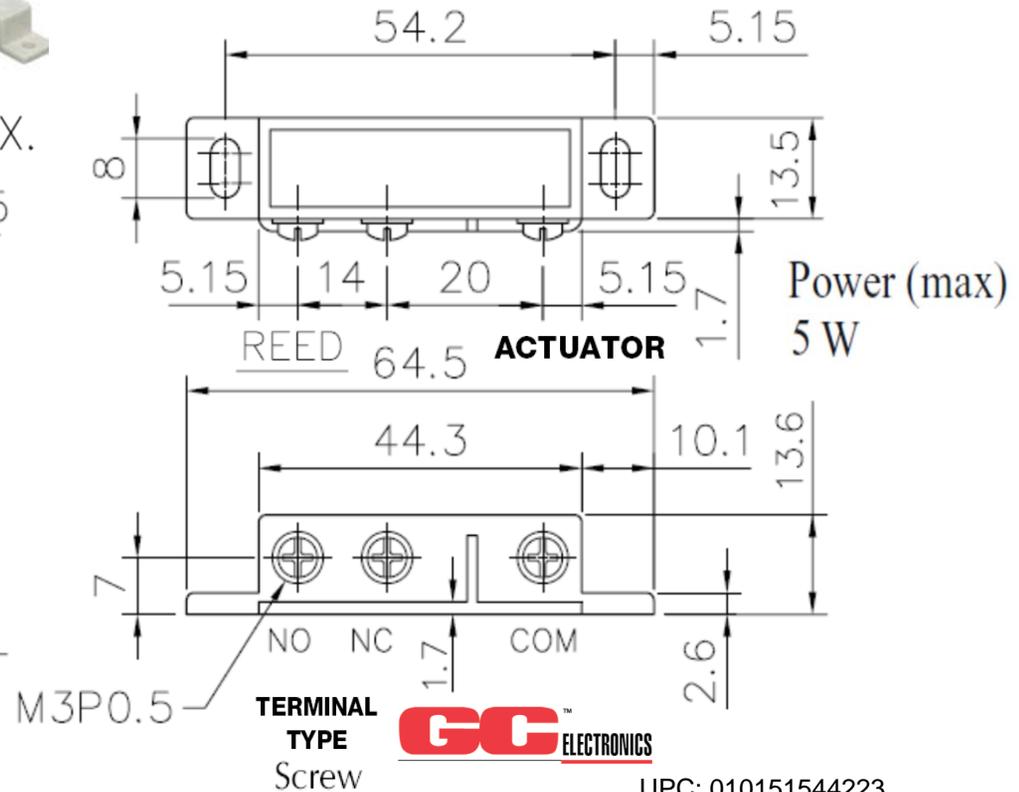

TERMINAL TYPE
Screw



UPC: 010151544223
HTS: 8536.50.9065
COO: TW

Switched Current

Switched Voltage:

400 mA max DC

175 V max DC

0.25 A DC

Switched Current AC
280 mA max RMS

Switched Voltage
125 V max AC,

100V DC