PART NO. 35 - 822

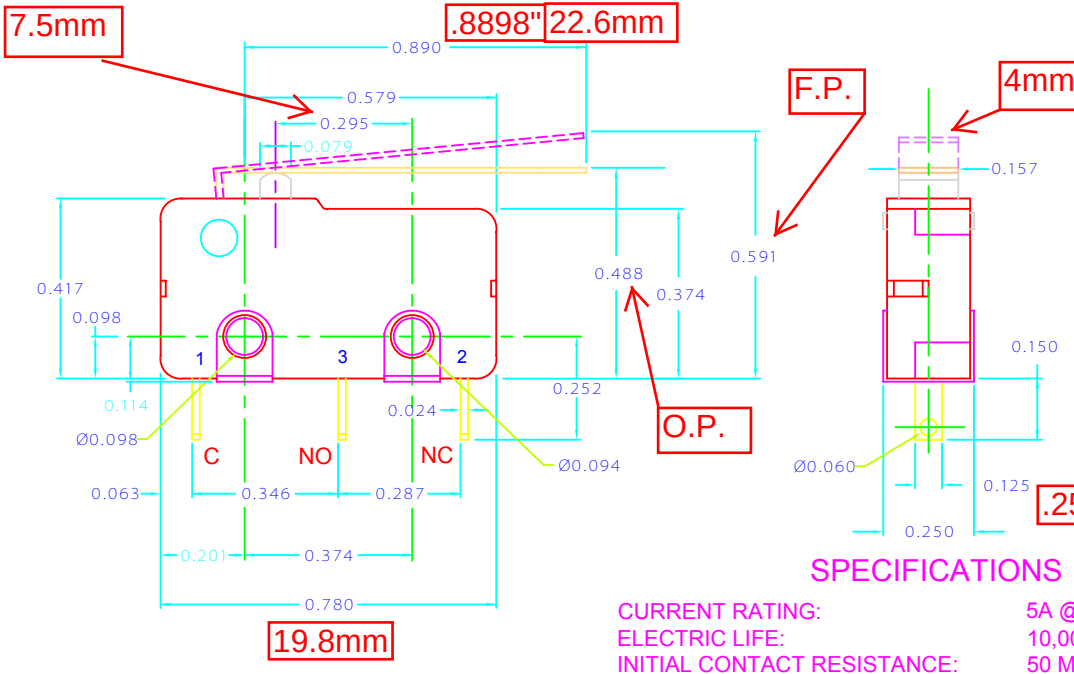

UPC: 010151544469
HTS: 8536509065
CoO: TW
RoHS: CERTIFIED

S.P.D.T.

SPECIFICATIONS

245 +/- 5 C for 5 sec.

CURRENT RATING:	5A @(125/250)Vac
ELECTRIC LIFE:	10,000 CYCLES
INITIAL CONTACT RESISTANCE:	50 MILLI-OHMS MAX.
INSULATION RESISTANCE:	100 MEGA-OHMS MIN. @500Vdc
WITHSTAND VOLTAGE:	1,000Vac - 1 MINUTE
CONTACT PLATING:	SILVER (STANDARD)
MECHANICAL LIFE:	100,000 CYCLES @ 2 Hz
TERMINAL TYPE:	FLAT SOLDER, SILVER PLATED BRASS
TERMINAL SOLDERABILITY:	(446)° F, (230)° C for 3 SEC.
OPERATING TEMPERATURE:	(5 TO 158)° F, (-15 TO 70)° C

OPERATING CHARACTERISTICS

O.F. :	1 oz.
O.P. :	0.488
F.P. :	0.591

O.F. 28 gf

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWINGS ARE THE PROPERTY OF GC ELECTRONICS. REPRODUCTION OR DISTRIBUTION OF THIS DRAWING MUST HAVE PRIOR WRITTEN CONSENT FROM GC ELECTRONICS.

TOLERANCE INCH

NO.	CHANGE	DATE

GC Electronics

PART NAME SUB - MINATURE SNAP ACTION SWITCH, 5A, LEVER

MAT'L

DRAWN S.R.S. 8/05/05

CHECKED

REV.

PART NO. 35 - 822

SHEET 1 OF 1 SCALE NTS : DIMENSIONS INCHES