

Snap Action Switch SPDT Pin Plunger 10A @ 125/250 Vac

P/N: 35-823

2026

O.F.: 80 +/- 25 g

O.P.: 14.7 +/- 0.8 mm

F. P.: 16.4 +/- 0.8 mm

1/2 HP 125Vac

3/4 HP 250Vac



UPC: 010151544483

HTS: 8536509065

CoO: China




Mechanical life cycle : 1,000,000

Loaded life cycle : 50,000

Dielectric strength : 1,000 Vac for 1 minute

Insulation resistance : 100M ohm min.(at 500 Vdc)

Contact resistance : 500m ohm initial (max.)

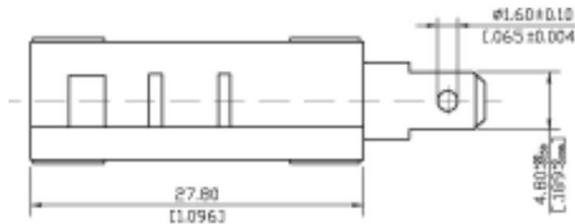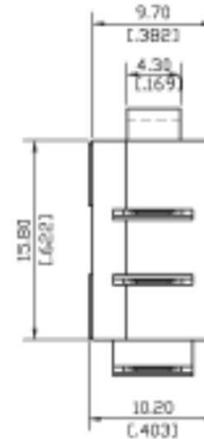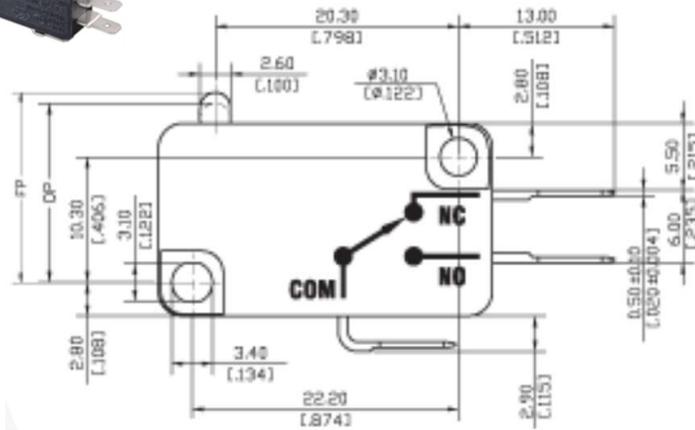

0.187" Quick connect