

AMPS	H.P.	H.P.
125/250	125	250
VAC	VAC	VAC
15	3/4	1-1/2


Red Pushbutton

35-830

RoHS: CERTIFIED




SPDT

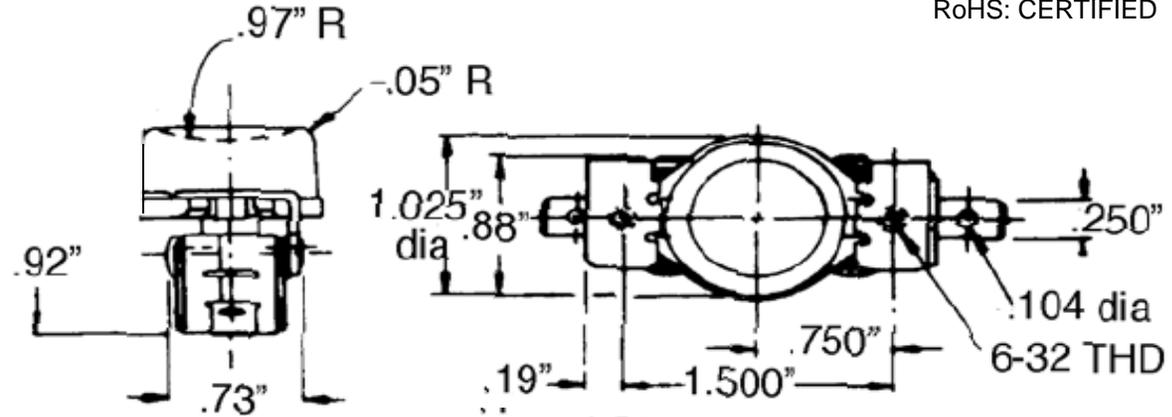

Specifications:

- Initial Contact Resistance:** 0.025 Ohms (max.)
- Insulation Resistance:** 1000 Megohms (min.)
- Dielectric Strength:** 1000V AC RMS
- Contact Material:** Fine Silver
- Terminal Material:** Brass – Silver plate
- Temperature Rating:** -55°C to +85°C
- Electrical Life:** 200,000 cycles
- Mechanical Life:** 500,000 cycles
- Mounting Hole:** 1"

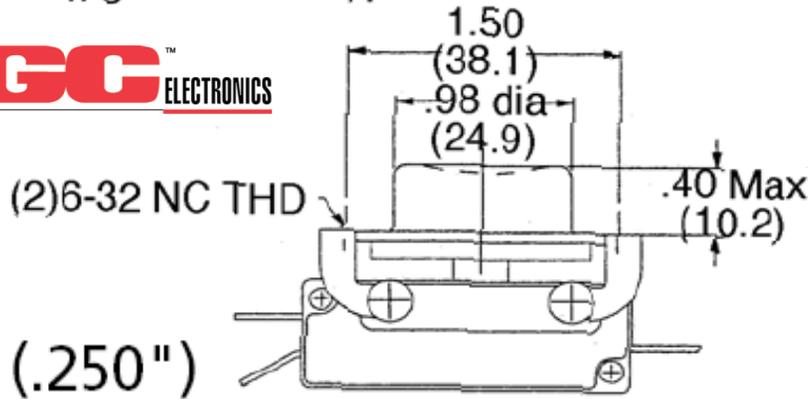

UPC: 010151544582 HTS: 8536.50.9065 CoO: CN or VN

P.T. MAX (In.)	O.T. MIN (In)	D.T. MAX (In)	O.F. MAX (Oz.)	O.F. MAX (Grams)
0.050	0.050	0.010	20	567

