


General Purpose Snap-acting Switch

SPDT

35-831


Actuator Large black button

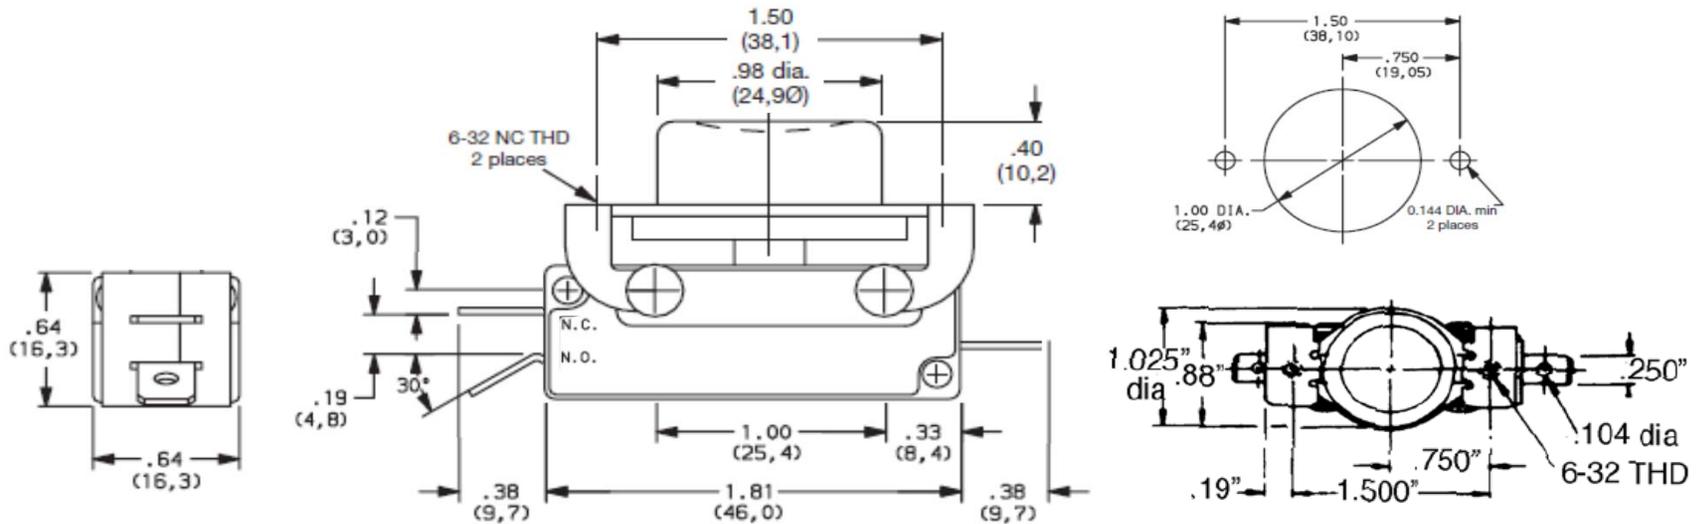

O.F. = 20 oz. (567 gm)
 R.F. = 3 oz. (85 gm)
 O.T = .050"
 P.T. = .050"

Heat resistant phenolic (UL 94V-0).

MOVABLE CONTACTS:
 Fine silver

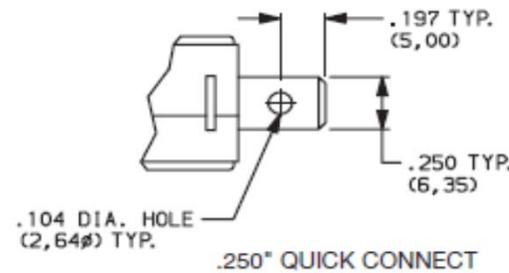

Electrical Rating

15 AMPS @ 125 & 250 V AC; 3/4 HP @ 125 V AC;
 1-1/2 HP @ 250 V AC.

INSULATION RESISTANCE: 1,000 M ohm min.
 DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
 OPERATING TEMPERATURE: -67°F to 185°F (-55°C to 85°C).

ELECTRICAL LIFE: 75,000 cycles at 25 AMPS @ 250 V AC,
 200,000 cycles at 15 AMPS @ 250 V AC.

UPC: 010151430502
 HTS: 8536.50.9065

CoO: CN or VN

