PART NO. 35 - 834

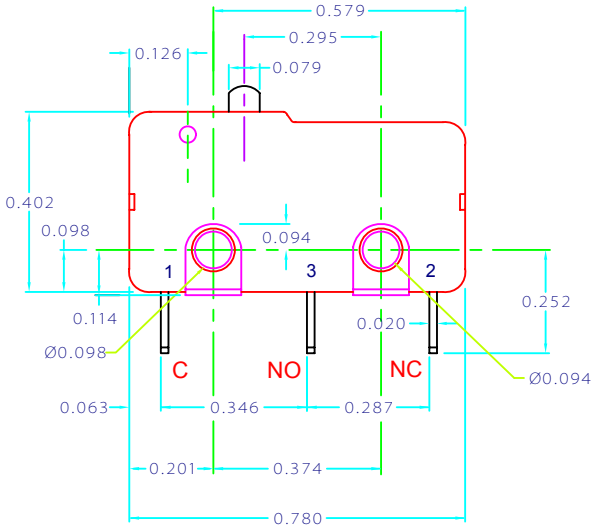

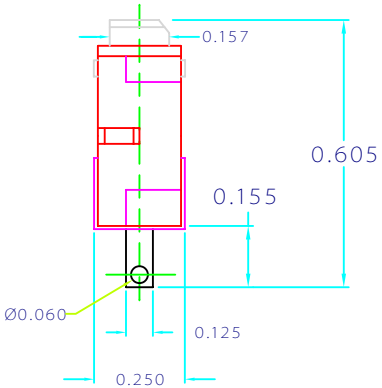

S.P.D.T.

UPC: 010151544629
HTS: 8536509065
CoO: TW

SPECIFICATIONS

CURRENT RATING:	5A (125/250)Vac
ELECTRIC LIFE:	(6,000 TO 100,000) CYCLES MIN.
INITIAL CONTACT RESISTANCE:	30 MILLI-OHMS MAX.
INSULATION RESISTANCE:	100 MEGA-OHMS MIN. @500Vdc
DIELECTRIC STRENGTH:	1,000Vac RMS MIN. (50-60)Hz
OPERATING FREQ. (ELEC) :	(10 TO 30) OP/MIN.
OPERATING FREQ. (MECH):	120 OP/MIN.
TERMINAL TYPE:	FLAT SOLDER
STORAGE TEMPERATURE:	(-13 TO 185)° F, (-25 TO 85)° C

OPERATING CHARACTERISTICS

O.F. : 4.7 oz.

O.P. : 0.450

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

TOLERANCE INCH

DRAWINGS ARE THE PROPERTY OF GC ELECTRONICS. REPRODUCTION OR DISTRIBUTION OF THIS DRAWING MUST HAVE PRIOR WRITTEN CONSENT FROM GC ELECTRONICS.

NO.	CHANGE	DATE

GC Electronics

PART NAME: SUB-MINATURE SNAP ACTION SWITCH, 5A

MAT'L

DRAWN: S.R.S. 8/04/05

CHECKED

REV.

PART NO. 35 - 834

SHEET 1 OF 1 SCALE NTS : DIMENSIONS INCHES