
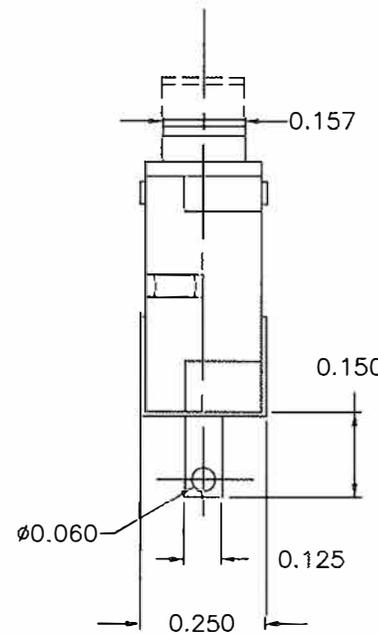


PART NO. 35-836

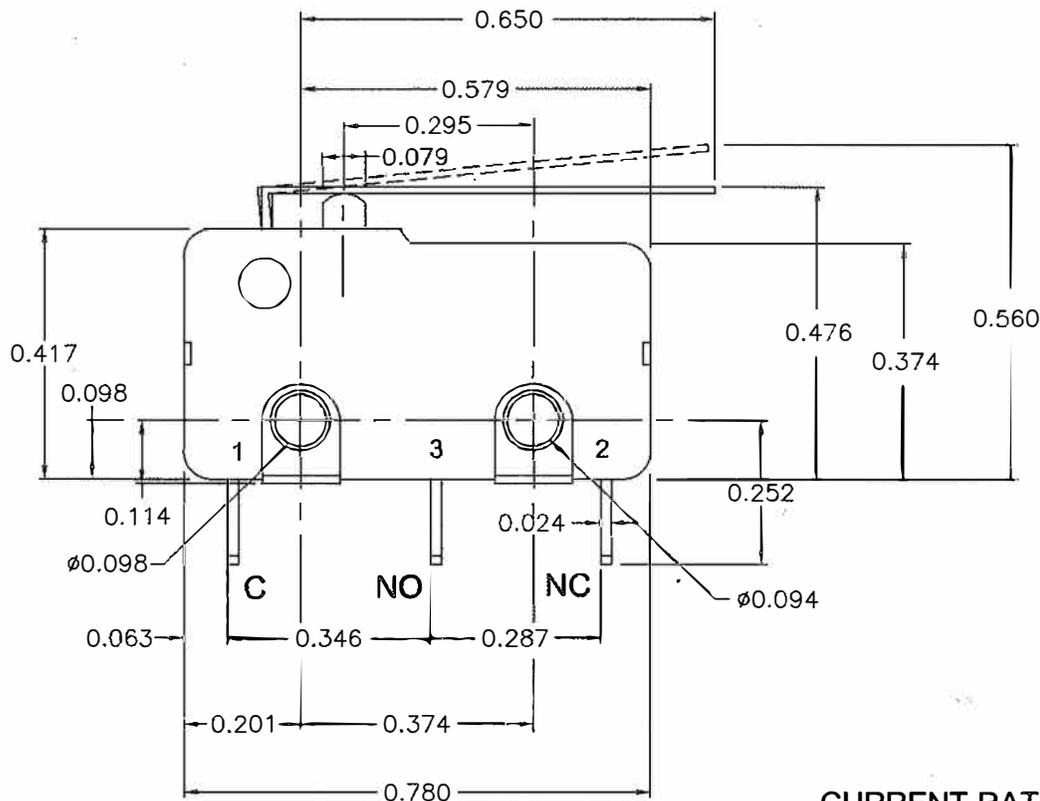

UPC: 010151544643
 HTS: 8536509065
 CoO: TW

S.P.D.T.

SPECIFICATIONS Ⓜ Ⓢ

OPERATING CHARACTERISTICS

O.F. : 1.4 oz.
 O.P. : 0.476
 F.P. : 0.560

CURRENT RATING: 5A @(125/250)Vac
 ELECTRIC LIFE: 10,000 CYCLES @ 1/6 Hz
 INITIAL CONTACT RESISTANCE: 50 MILLI-OHMS MAX.
 INSULATION RESISTANCE: 100 MEGA-OHMS MIN. @500Vdc
 WITHSTAND VOLTAGE: 1,000Vac - 1 MINUTE
 CONTACT PLATING: SILVER (STANDARD)
 MECHANICAL LIFE: 100,000 CYCLES @ 2 Hz
 TERMINAL TYPE: FLAT SOLDER, SILVER PLATED BRASS
 TERMINAL SOLDERABILITY: (446)° F, (230)° C for 3 SEC.
 OPERATING TEMPERATURE: (5 TO 158)° F, (-15 TO 70)° C

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONS ARE FOR REFERENCE
 PURPOSES ONLY.

DRAWINGS ARE THE PROPERTY OF
 GC ELECTRONICS. REPRODUCTION OR
 DISTRIBUTION OF THIS DRAWING MUST
 HAVE PRIOR WRITTEN CONSENT FROM
 GC ELECTRONICS.

GC Electronics

PART NAME SUB-MINATURE SNAP ACTION SWITCH, 5A, LEVER
 MAT'L

DRAWN S.R.S. 8/03/05
 CHECKED REV.

PART NO.
 35-836