

Snap Action Switch SPDT Pin Plunger 15A @ 125/250 Vac



P/N: 35-840

2026

RoHS




non-Lever

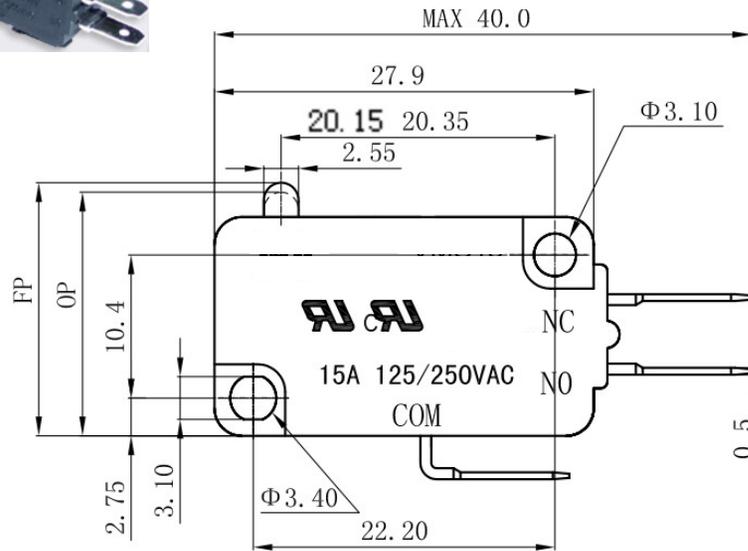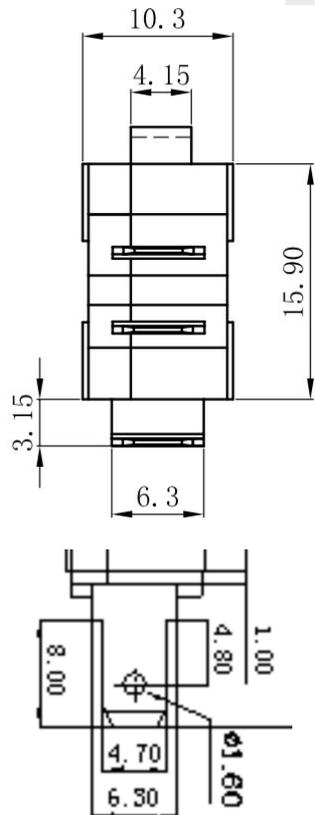

O.F.: 160 +/- 40 g

O.P.: 17.45 +/- 0.5 mm

F.P.: 18.35 +/- 0.5 mm

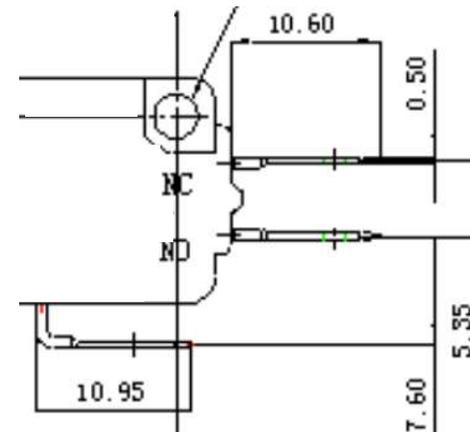

UPC: 010151544681

HTS: 8536509065

CoO: China

.187" quick connect

Operating Temp.: (-25 to 85)°C
 Mechanical life : 100,000 cycles
 Electrical life : 10,000 cycles

Contact Resistance: <100mΩ
 Insulation Resistance: >100MΩ 500Vdc
 Withstand Voltage: 1,500Vac 1 minute