

35-840

15 A @ 125 & 250 V AC
1/4 A @ 250 V DC
1/2 A @ 125 V DC
1/2 HP @ 125 & 250 V AC
3 A @ 125 V AC "L"

Snap Action SPDT Pin Plunger 15A Switch

O.F. = 5.29 oz. (150 gm)



Return F. = 1.06 oz. (30 gm)

Release F. = 2.12 oz. (60 gm)



P.T. = 0.056" (1.42mm)

D.T. = 0.013" (0.33mm)

O.T. = 0.035" (0.89mm)

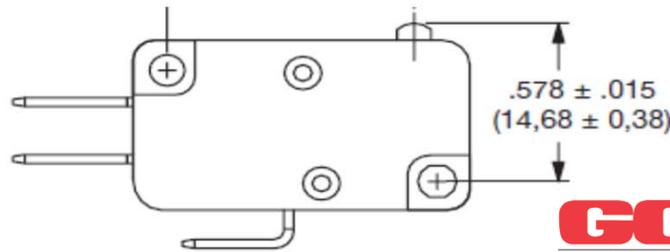

.187" quick connect

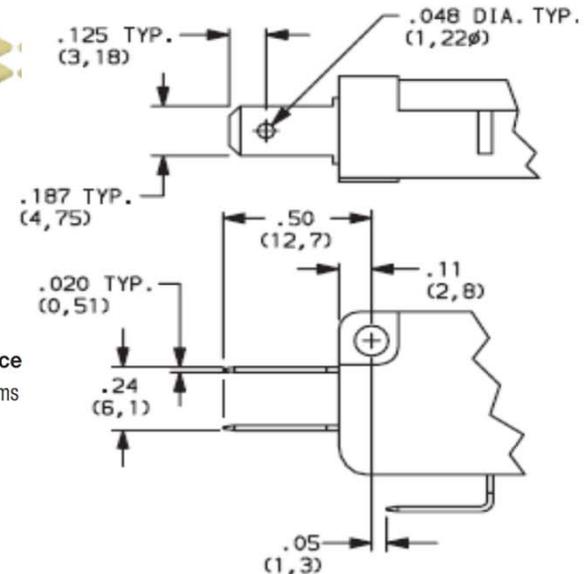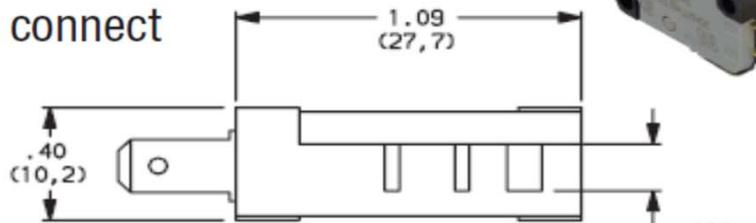


SPDT

screw size: 4-40. MOUNTING: Torque screws 2-5 in/lbs.

ACTUATOR BUTTON: Thermoplastic (UL 94V-0).

Operating Force
5.29 oz./150 grams

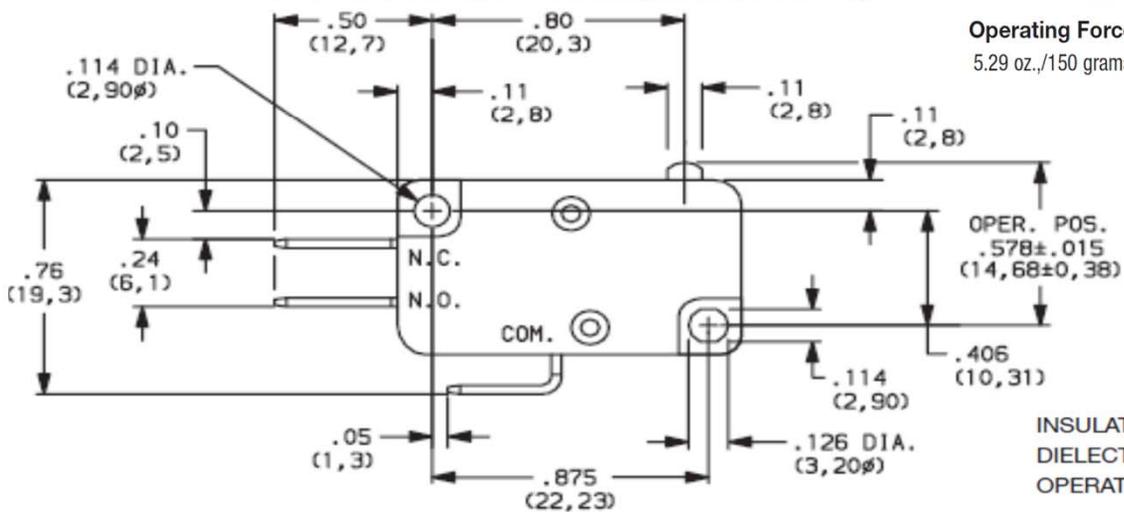

UPC: 010151544681

HTS: 8536.50.9065

COO: CN

RoHS: CERTIFIED

INSULATION RESISTANCE: 1,000 M ohms min.
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).