


**35-842**

15 A @ 125 & 250 V AC  
1/4 A @ 250 V DC  
1/2 A @ 125 V DC  
1/2 HP @ 125 & 250 V AC  
3 A @ 125 V AC "L"



**Snap Action SPDT Simulated Roller 15A Switch**

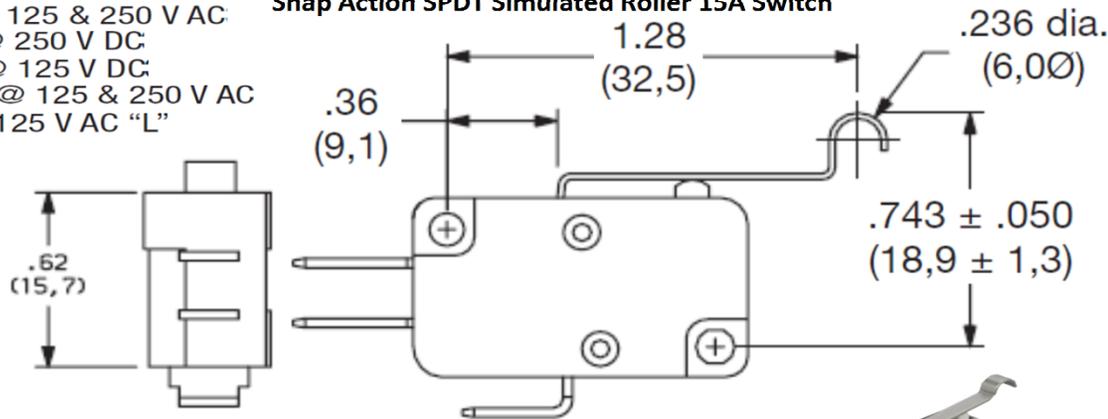

O.F. = (3.17 - 5.29) oz.  
(90-150) gm  
Return F. = 0.35 oz. (10 gm)  
Release F. = 0.71 oz. (20 gm)  
P.T. = 0.140" (3.56mm)  
D.T. = 0.050" (1.27mm)  
O.T. = 0.062" (1.57mm)



.187" quick connect

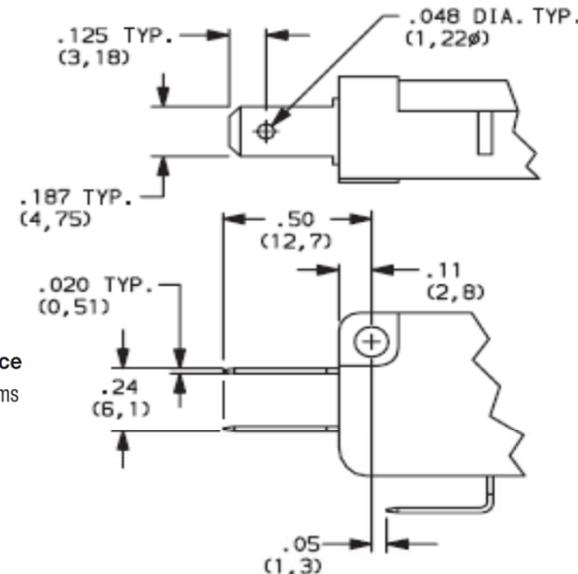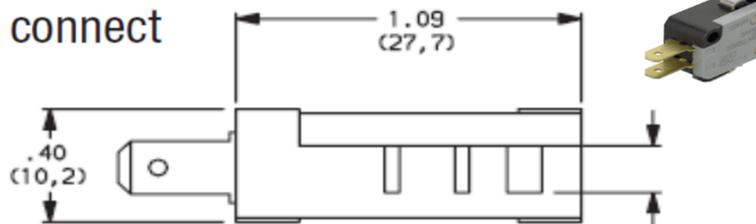


**SPDT**

screw size: 4-40. MOUNTING: Torque screws 2-5 in/lbs.

ACTUATOR BUTTON: Thermoplastic (UL 94V-0).

Operating Force  
5.29 oz./150 grams

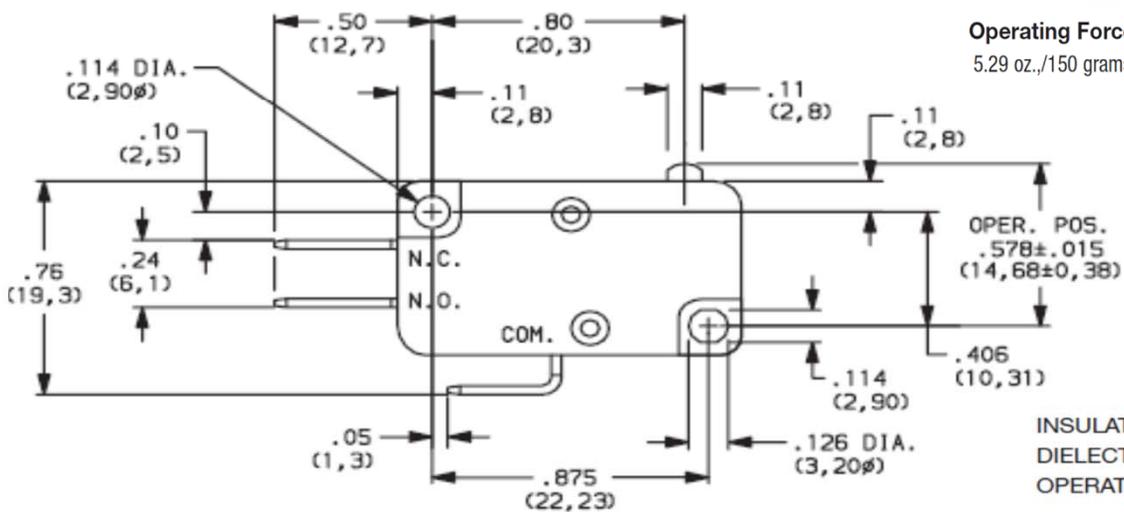

UPC: 010151544704  
HTS: 8536.50.9065  
COO: CN

RoHS: CERTIFIED

INSULATION RESISTANCE: 1,000 M ohms min.  
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.  
OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).