



# Miniature Snap-acting Switch

SPDT

RoHS  
COMPLIANT

# 35-846




.81" lever roller, high force

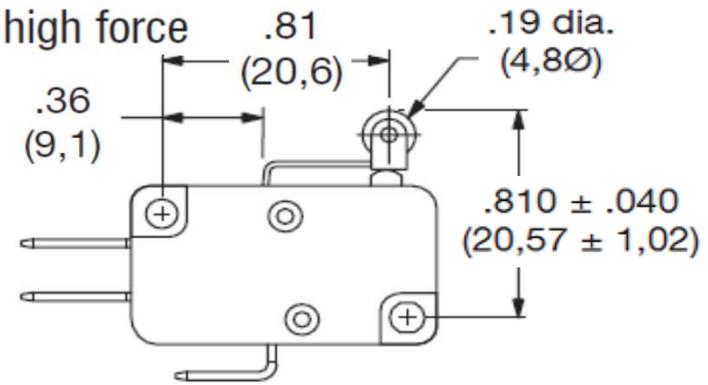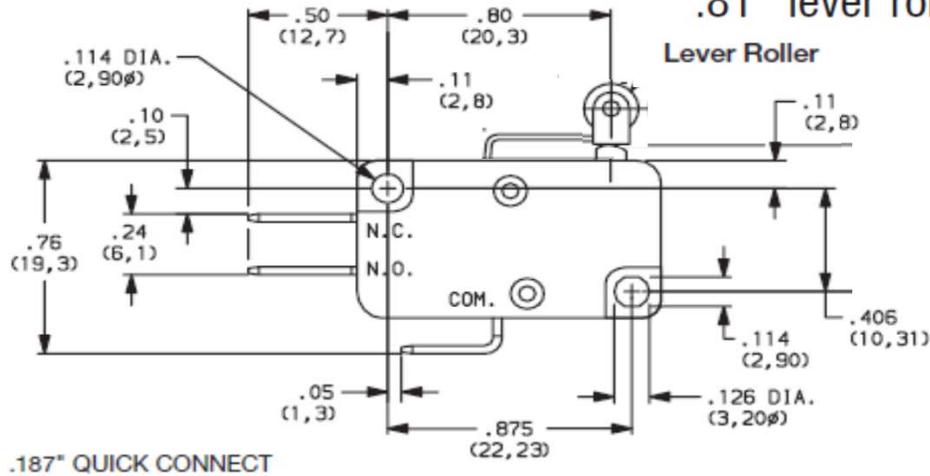

Recommended maximum screw size: 4-40.

Silver Contacts

All models 

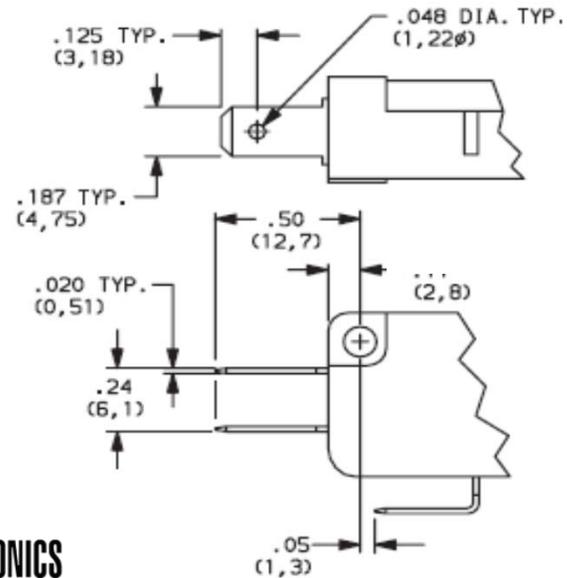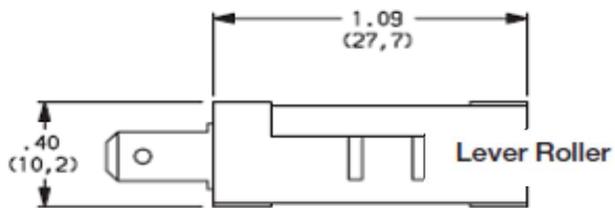

10 A @ 125 & 250 V AC  
1/3 HP @ 125 & 250 V AC  
1/2 A @ 125 V DC; 1/4 A @ 250 V DC

O.F. = (2.65- 3.17) oz.  
R.F. = .99 oz.  
Ret F. = .53 oz.  
D.T. = .013 in.  
P.T. = .070 in.  
O.T = .035 in.

UPC: 010151544742  
HTS: 8536.50.9065  
COO: CN

