



Miniature Snap-acting Switch

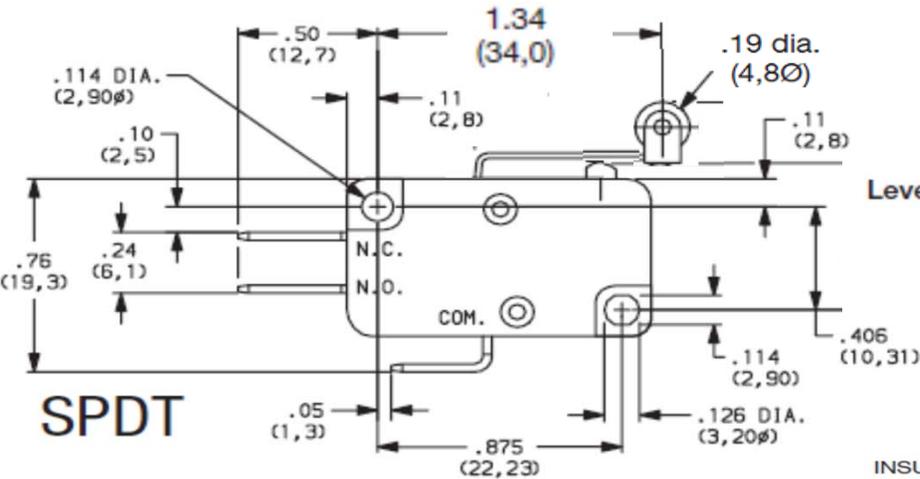


SPDT

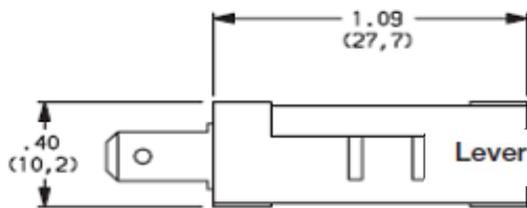

.187" QUICK CONNECT

- O.F. = (2.82 - 5.29) oz. (80 - 150 gm)
- R.F. = .71 oz. (20 gm)
- Ret F. = .35 oz. (10 gm)
- D.T. = .030 in. (0.76mm)
- P.T = .160 in. (4.06mm)
- O.T = .065 in. (1.65mm)
- UPC: 010151544766
- HTS: 8536.50.9065
- COO: CN CHINA

Silver Contacts




- 15 A @ 125 & 250 V AC
- 1/4 A @ 250 V DC
- 1/2 A @ 125 V DC
- 1/2 HP @ 125 & 250 V AC
- 3 A @ 125 V AC "L"

SPDT **# 35-848**

RoHS COMPLIANT

1.34" lever roller, high force

ACTUATOR BUTTON: Thermoplastic (UL 94V-0).

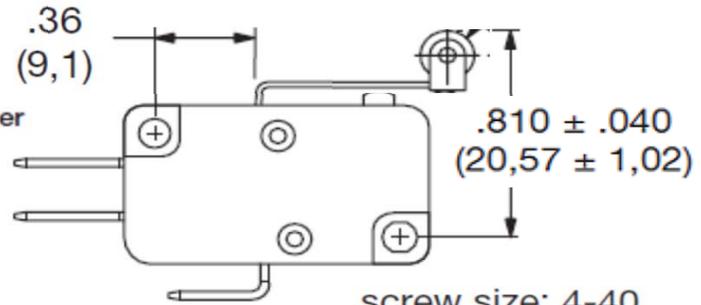

screw size: 4-40.
MOUNTING: Torque screws 2-5 in/lbs.

INSULATION RESISTANCE: 1,000 M ohms min.
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.
OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).

