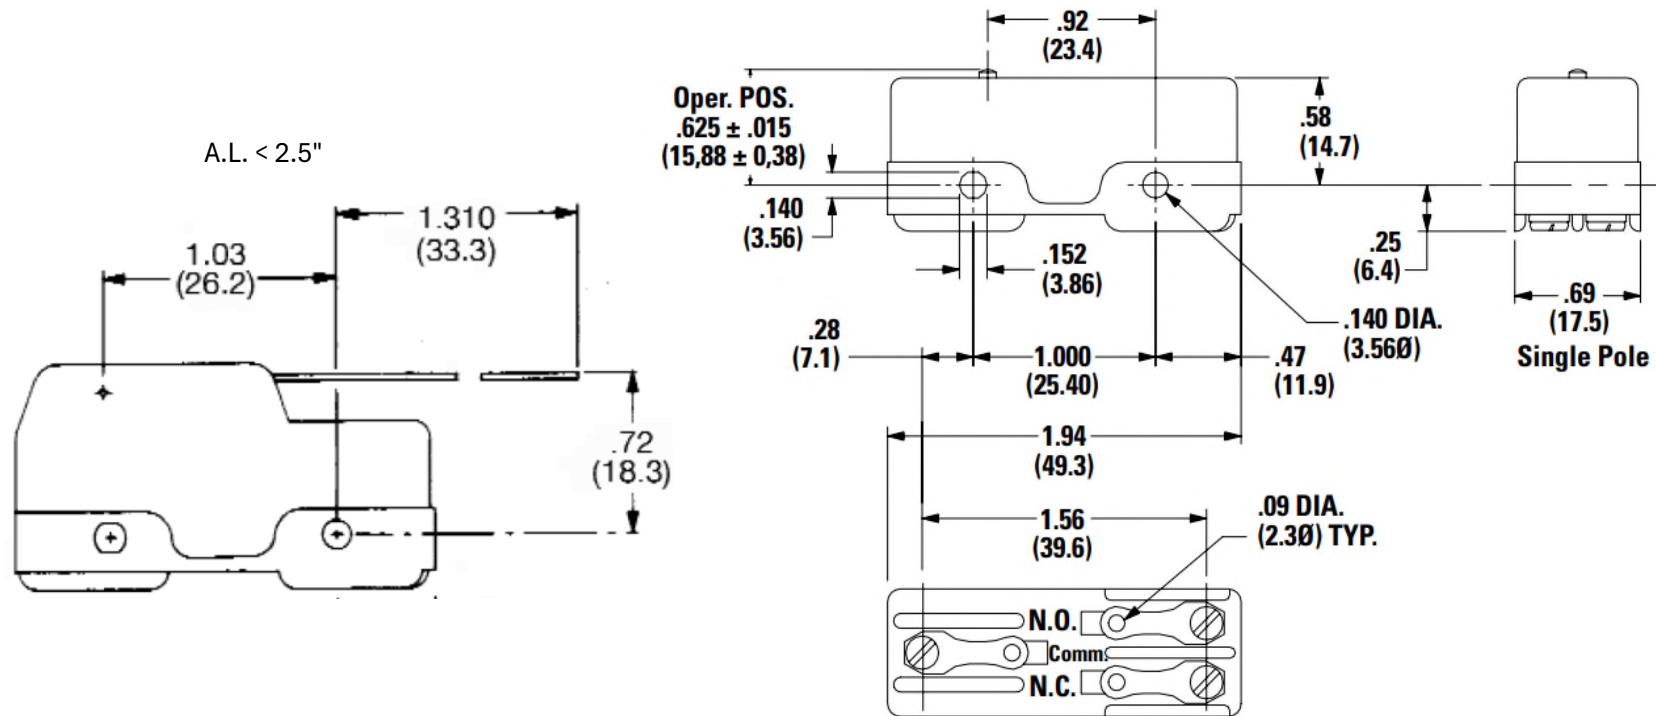


Switch Snap Action SPDT, Lever, Screw terminals

P/N: 35-890

20A at 125 Vac (and 250, 480). 0.5 A @ 125 Vdc

1/2 H.P. @ 125Vdc, 1/4 H.P. @ 250 Vdc

**O.F. Operating Force** = 1.76 oz./50 grams _ or 3.5 / 100R.F. Min. **Release Force** (oz./grams) = 0.5 / 14D.T. **Differential Travel** max. (in./mm) = 0.156 / 3.96P.T. **Pre-Travel** = 0.38 (9.7)O.T. **Over Travel** = 0.19 (4.8)

Nominal Contact Separation (in./mm) = .020 (0.51)

Flat base, solder, 4-40 screws