


Pin Assignment

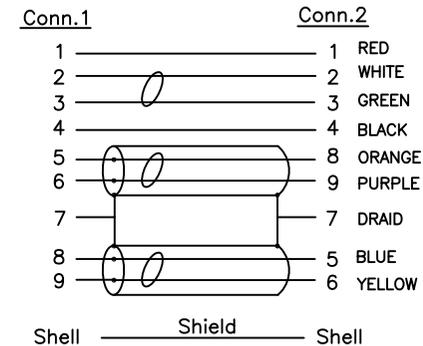

ELECTRICAL TEST:

- 1.100% OPEN SHORT SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE: 2 OHM(MAX)
- 3.INSULATION RESISTANCE: 10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

NO.	ITEM	DISCRIPTION	Q'TY	UNIT	REV.	ECN	DESCRIPTION	DATE	NAME		
7	A5-R047095	45P Blue PVC RoHS	18	g		<b>TOLERANCE</b> INCHES    M/M		<b>TITLE:</b> USB 3.0 AM TO AM 28AWG Blue			
6	A10-R075001	Black heat-shrinkable tube:ø0.8	4	pcs		.X	.020			.30	
5	A10-R075005	Black heat-shrinkable tube:ø2.5	4	pcs	.XX	.015	.30				
4	A6-R028172	USB 3.0 A(M) Rear Shell Nickel Plated	2	pcs	.XXX	.005	.05				
3	A6-R104523	USB 3.0 A(M) Front Shell Gold Plated	2	pcs	DRAWN BY	AX.Ding		CUSTOMER :			
2	A2-R028490	USB 3.0 A(M) 9P Blue Insulation PIN Gold Plated 15u	2	pcs	CHECK BY			CUSTOMER P/N: 45-1431			
1	A4-R002034	UL 20275 USB 3.0 Cable (28AWG*1P+EAM)*2+28AWG*1P+24AWG*2C+ADB OD:5.5±0.2mm 65%AL Color: Blue	1	m	APPD BY			SCALE	NONE	DRAWING NO:	REV A
								UNIT	MM		
								DATE	2017.05.26		