




ITEM
GC Elect.
64-811

64-811

Parameter Specifications	
Electrical Rating	125V/15AMPS
Outlet	1
Max. Surge Voltage	6000 V
Max. Surge Dissipation	750 Joules
Max. Spike Current	13500 A
Clamping Voltage	500 V (L-N, L-G, N-G)
Response Time	Less Than 1 Nanosecond
EMI/RFI	150KHz - 30MHz
Noise Filter Attenuation	up to 20dB
Temp.	-40°C to 80°C
3-Line Protection	

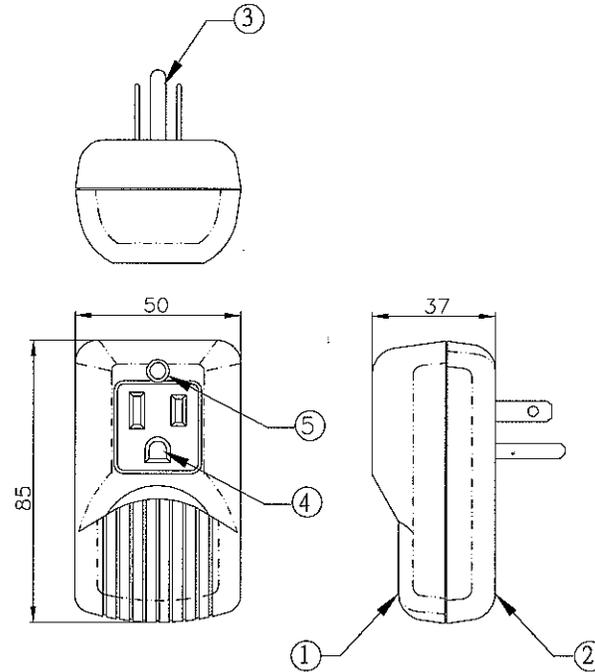

Materials Specifications				
No	Qty	Description	Material	Notes
1	1	Front Housing	ABS	Light Gray Color
2	1	Rear Housing	ABS	Light Gray Color
3	1	A/C Plug	Brass	NEMA 5-15
4	3	Contact	Brass	
5	1	SURGE INDICATOR	LED	Red Color

AUG 21 2012