


## CLASS 2 FOOT MOUNT TRANSFORMERS – 40 & 50VA

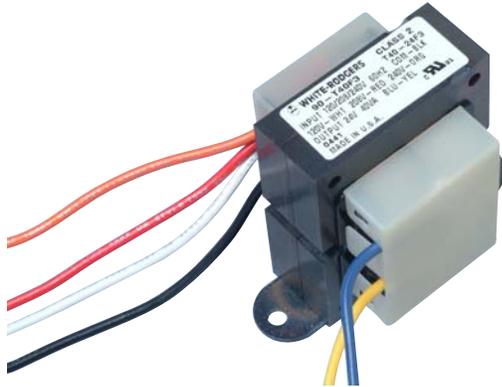

### APPLICATIONS:

- Commercial Dryers
- Deep Fryers
- Greenhouse Controls
- HVAC – Heating, Ventilation, Air Conditioning Systems
- Security Systems
- Video Games
- Automatic Doors
- Solar Heating Controls

### AVAILABLE INPUT VOLTAGES:

- 120V, 208/240V and 120/208/240V

### TRANSFORMER TERMINATIONS:

- 11" Color Coded Leads


### FEATURES:

- Convenient Mounting Plate
- Protective Plastic Covers

### GENERAL INFORMATION

Safety Agency Certification: **cRU** U.S. U.L. File No. E33334  
 Recognized under Category XOKV2/XOKV8  
 NEC Classification: Class 2, Inherently Limited  
 U.L. Insulation Class: Class B (130°C Max)  
 Output Voltage: 24VAC

### OUTLINE DRAWING

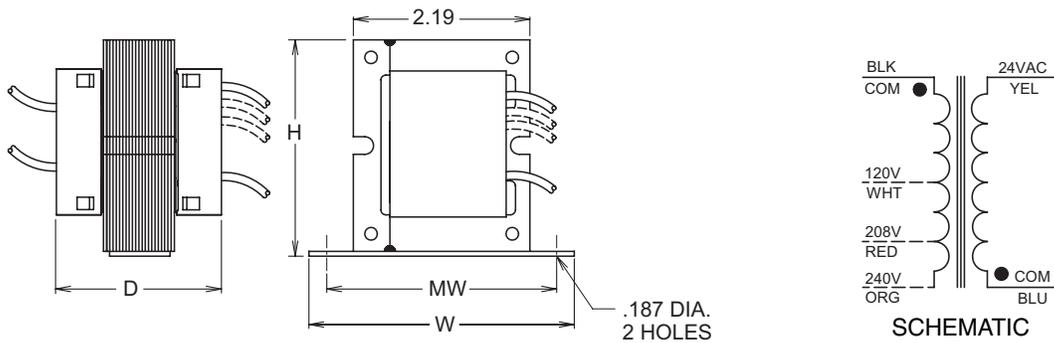

| STANCOR PART NUMBER | INPUT VOLTAGE | FREQ Hz | OUTPUT VOLTAGE | OUTPUT CURRENT | VA | MOUNTING | PRI TERM. | SEC TERM. | DIMENSIONS-INCHES |      |      |      | Wt. (Lbs) |
|---------------------|---------------|---------|----------------|----------------|----|----------|-----------|-----------|-------------------|------|------|------|-----------|
|                     |               |         |                |                |    |          |           |           | H                 | W    | D    | MW   |           |
| T40-24F1            | 120           | 60      | 24             | 1.67           | 40 | FOOT     | LEADS     | LEADS     | 2.75              | 3.25 | 2.19 | 2.81 | 1.36      |
| T40-24F2            | 208/240       | 50/60   | 24             | 1.67           | 40 | FOOT     | LEADS     | LEADS     | 2.75              | 3.25 | 2.19 | 2.81 | 1.44      |
| T40-24F3            | 120/208/240   | 60      | 24             | 1.67           | 40 | FOOT     | LEADS     | LEADS     | 2.75              | 3.25 | 2.19 | 2.81 | 1.44      |
| T50-24F3            | 120/208/240   | 60      | 24             | 2.08           | 50 | FOOT     | LEADS     | LEADS     | 2.75              | 3.25 | 2.63 | 2.81 | 1.96      |