

## POWER STRIPS

Electrical Ratings: 125V/15A/1875W

Retail Part Number	Number Of Outlets	Description	Cord	15 amp Breaker	Agency Listing
64-807	6	Power Strip	4'-14/3"	Y	UL, CSA
64-671	8	Industrial Power Block	6'-14/3"	Y	UL, CUL



USE FOR  
SHOP/INDUSTRIAL

USE FOR  
HOME/OFFICE

64-671

64-807

## SURGE POWER CENTER & BLOCKS

Electrical Ratings: 125V/15A/1875W  
 Response Time: ≤ 1 nano second  
 Line Protection: H-N, N-G, H-G  
 Max Surge Voltage: 6000V  
 EMI/RF Filtering:  
 64-0811 100 KHz-50MHz, up to 58 dB  
 64-0813 100 KHz-100MHz, up to 52 dB



Fig. 1

Fig. 2

Fig. 3

USE FOR  
COMPUTER

USE FOR  
HOME/OFFICE

USE FOR  
HOME/OFFICE

Retail Part Number	Figure Number	Number Of Outlets	Description	Color	D-DSS Coax Tele	Max Diss in Joules	Max Surge Voltage	Max Spike Current	Clamping Voltage	EMI/RF Filtering	Agency Listing
64-6651	1	5	Metal Power Center	Ivory	T-40 J	260 J	6000 V	4500 amps	330 V	Y	UL

Retail Part Number	Figure Number	Number Of Outlets	Description	Color	15 amp Breaker	D-DSS Coax Tele	Max Diss in Joules	Max Spike Current	Clamping Voltage	EMI/RFI Filtering	Line Protection (mov)	Agency Listing
64-811	3	1	Surge Block	Gray	N	None	270 J	4500 amps	330 V	N	H-N, N-G, H-G	UL
64-813	2	3	Surge Block w/ EMI/RFI Filter	Gray	N	None	171 J	9000 amps	340 V	Y	H-N, N-G, H-G	UL, CSA

# SURGE PROTECTORS



## SURGE STRIPS

GC Electronics offers a variety of Surge Protection Power Strips to meet your needs.

Electrical Ratings: 125V/15A/1875W  
 Response Time: ≤ 1 nano second  
 Max Surge Voltage: 6000V  
 Telephone Modular Jack: RJ11



USE FOR: HOME/OFFICE HOME/OFFICE SHOP/INDUSTRIAL HOME/OFFICE HOME/OFFICE COMPUTER HOME THEATRE

Retail Part Number	Figure Number	Number Of Outlets	Description	Cord Specs	Color	15 amp Breaker	D-DSS Coax Tele	Max Joules
64-663	1	4	Surge Strip	3' - 14/3	Gray	Y	None	90 J
64-830	2	5	Surge EMI/RFI Strip	4' - 14/3	Ivory	Y	C - 46 J	200 J
64-661	3	6	Surge Strip	4' - 14/3	Gray	Y	None	90 J
64-6610	3	6	Surge Strip	10' - 14/3	Gray	Y	None	90 J
64-6615	3	6	Surge Strip	15' - 14/3	Gray	Y	None	90 J
64-668	3	6	Surge Strip	4' - 14/3	Gray	Y	None	270 J
64-631	4	6	Metal Surge Strip	4' - 14/3	Gray	Y	None	450 J
64-804	5	6	Surge EMI/RFI Strip	4' - 14/3	Gray	Y	T - 72 J	357 J
64-667	6	6	Surge EMI/RFI Strip	4' - 14/3	Gray	N	None	555 J
64-669	7	6	PC Smart Surge	6' - 14/3	Gray	Y	T - 160 J	1100 J
64-670	8	10	Home Ent. System Surge	6' - 14/3	Gray	Y	D, C, T-160 J	1665 J

Retail Part Number	Figure Number	Max Surge Voltage	Max Spike Current	Clamping Voltage	Line Protection (mov)	EMI/RFI Filtering Specs	Agency Listing
64-663	1	6500 V	4500 A	330 V	H-N	n/a	UL, CSA
64-830	2	6500 V	4500 A	400 V	N-G, H-G	100 KHz-30 MHz/Up to 40 dB	UL, CSA
64-661	3	6500 V	4500 A	330 V	H-N	n/a	UL, CSA
64-6610	3	6500 V	4500 A	330 V	H-N	n/a	UL, CSA
64-6615	3	6500 V	4500 A	330 V	H-N	n/a	UL, CSA
64-631	4	6000 V	13,500 A	330 V	H-N, N-G, H-G	100 KHz-50 MHz/Up to 40 dB	UL, CUL
64-668	3	6000 V	13,500 A	330 V	H-N, N-G, H-G	100 KHz-50 MHz/Up to 52 dB	UL, CUL
64-804	5	6000 V	4500 A	330 V	H-N, N-G, H-G	150 KHz-100 MHz/Up to 40 dB	UL
64-667	6	6000 V	13000 A	330 V	H-N, N-G, H-G	150 KHz-100 MHz/Up to 40 dB	UL, CUL
64-669	7	6000 V	26000 A	330 V	H-N, N-G, H-G	150 KHz-100 MHz/Up to 40 dB	UL, CUL
64-670	8	6000 V	39000 A	330 V	H-N, N-G, H-G	150 KHz-100 MHz/Up to 40 dB	UL, CUL

SURGE PROTECTORS

For the latest information—[www.gcelectronics.com](http://www.gcelectronics.com)  
 All quantities are single; BU's are packages of 10 Unless otherwise noted.

## POWER BLOCKS



Fig. 1



Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6



Fig. 7

Retail Part Number	Figure Number	Number Of Outlets	Description	Electrical Ratings	Color	Surge Protection
WD-0396	1	6	Adapter	125V/15A/1875W	White	N
WD-0794B	2	3	Adapter	125V/15A/1875W	Ivory	N
WD-0796	1	6	Adapter	125V/15A/1875W	Ivory	N
WD-7402	3	6	Tight-Spot Wall Mt Block Tap	125V/15A/1875W	White	N
64-839	4	1	Adapter	125V/15A/1875W	White	N
64-840-WH	5	3	Adapter	125V/15A/1875W	White	N
64-840-OR	6	3	Adapter	125V/15A/1875W	Orange	N
64-840-GN	7	3	Adapter	125V/15A/1875W	Green	N

## WOODS POWER STRIPS



Fig. 8



Fig. 9



Fig. 10



Fig. 11



Fig. 12

Retail Part Number	Figure Number	Number Of Outlets	Description	Electrical Ratings	Cord Specs	Color	15 amp Breaker	Surge Protection
WD-7416	8	4	Countertop Strip	125V/15A/1875W	1.5' - 14/3	White	N	N
WD-2371	9	6	Strip	125V/15A/1875W	3' - 14/3	Ivory	Y	N
WD-2174	10	6	Strip	125V/15A/1875W	8' - 14/3	Ivory	Y	N
WD-7499	11	9	Transformer Spaced Strip	125V/15A/1875W	3' - 14/3	Ivory	Y	N
WD-7408	12	6	Transformer Deck/Strip	125V/15A/1875W	4' - 14/3	Black/Yellow	N	N



Fig. 13



Fig. 14



Fig. 15



Fig. 16

These Woods power cords are a convenient way to connect equipment to power sources up to 25 feet away.

Retail Part Number	Figure Number	Number Of Outlets	Description	Electrical Ratings	Cord Specs	Color	Surge Protection
WD-5601	13	1	3 Cond Office Cord	125V/13A/1625W	25' - 16/3	Black	N
WD-5606	14	3	2 Cond Office Cord	125V/13A/1625W	10' - 16/2	Gray	N
WD-5607	15	3	3 Cond Office Cord	125V/13A/1625W	10' - 16/3	Gray	N
WD-5754	16	3	3 Cond Office Cord	125V/13A/1625W	20' - 16/3	Gray	N

# SURGE PROTECTORS



## SURGE BLOCKS


Electrical Ratings: 125V/15A/1875W      Response Time: ≤ 1 nano second



Retail Part Number	Figure Number	Number Of Outlets	Description	Color	D-DSS Coax Tele	Max Diss in Joules	Clamping Voltage	Line Protection	EMI/RFI Filtering	Equipment Guarantee	Surge Warranty
WD-7461	1	1	StormGuard Surge Tap	White	None	70 J	400 V	L-N	N	\$500 Equip	One Year
WD-2277	2	1	Phone/Fax Surge Tap	Off White	T	500 J	330 V	L-N, L-G, L-G	Y	None	One Year
WD-6910	3	1	Home Elec Surge	Off White	None	810 J	330 V	L-N, L-G, N-G	Y	\$5000 Equip	One Year
WD-6510	4	1	Home Elec Surge Tap	Off White	None	300 J	330 V	L-N, N-G, L-G	Y	None	One Year
WD-5613	5	3	Office Surge Tap	Off White	None	500 J	330 V	L-N, N-G, L-G	Y	None	One Year
WD-6918	6	6	Home Elec Surge	Off White	None	810 J	330 V	L-N, L-G, N-G	Y	None	Lifetime
WD-6919	7	6	Surge Tap	Off White	T	810 J	330 V	L-N, L-G, N-G	Y	\$5000 Equip	One Year
WD-5185	8	6	Computer Surge Tap	Off White	None	750 J	330 V	L-N, N-G, L-G	Y	None	Lifetime
64-681	9	6	Home Surge	Off White	None	180 J	330 V	L-N, N-G, L-G	N	None	One Year
64-682	10	6	Home Surge w/Coax	Off White	C	180 J	330 V	L-N, N-G, L-G	N	None	One Year
64-683	11	6	Home Surge w/Phone	Off White	T	180 J	330 V	L-N, N-G, L-G	N	None	One Year

## SURGE STRIPS

Electrical Ratings: 125V/15A/1875W      Clamping Voltage: 330V  
 Circuit Protection: 15 amp Breaker      Response Time: ≤ 1 nano second  
 Line Protection: H-N, N-G, H-G

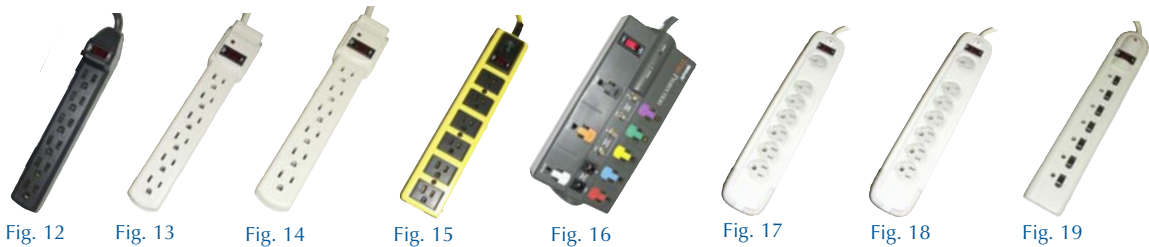

Retail Part Number	Figure Number	Number Of Outlets	Description	Cord Specs	Color	D-DSS Coax Tele	Max Diss in Joules	Clamping Voltage	Line Protection	EMI/RFI Filtering	Warranty
WD-5700	12	6	Surge Strip	3' - 14/3	Charcoal Gray	None	250 J	330 V	L-N	N	One Year
WD-0418	13	6	Home Elec Protector Strip	4' - 14/3	Ivory	None	1000 J	330 V	L-N, N-G, L-G	Y	One Year
WD-5723	14	6	Home Elec Surge Strip	10' - 14/3	Off White	None	1000 J	330 V	L-N, N-G, L-G	Y	One Year
WD-5138	15	6	Metal Surge Strip	15' - 14/3	Yellow	None	1050 J	330 V	L-N, L-G, N-G	Y	Lifetime
WD-6517	16	8	DSS Protector Brick	6' - 14/3	Charcoal Gray	D, C & T	1567 J	330 V	L-N, L-G, N-G	Y	Lifetime
WD-6941	17	7	Surge Strip with Phone Jack	6' - 14/3	Off White	T	1085 J	330 V	L-N, L-G, N-G	Y	\$30,000
WD-6939	18	7	Surge Strip	4' - 14/3	Off White	None	1085 J	330 V	L-N, L-G, N-G	Y	\$30,000
WD-5197	19	7	Computer Surge Strip	8' - 14/3	Ivory	T-120 J	1050 J	330 V	L-N, L-G, N-G	Y	Lifetime

SURGE PROTECTORS

For the latest information—[www.gcelectronics.com](http://www.gcelectronics.com)  
 All quantities are single; BU's are packages of 10 Unless otherwise noted.

## HOME THEATRE SURGES

### HOME THEATRE SURGE PROTECTION

The Epitome line of surge protectors have you covered for all your protection needs. From the 200 Joule strip for small inexpensive devices to the 8000 Joule Home Theater strip that has almost triple the protection of the "Beast brand". Besides having 3-line protection, Phone, Fax, Modem and Satellite protection and LED indicators, several new innovations have been added. Model **64-843** features two sets of triple outlets that swivel a full 90° for wall-hugging ability. Model **64-687** features corner mounting with a whopping 8000 Joules of protection. Model **64-692** features a noise filtering circuit that removes noise generated by appliances and poor power lines. Model **64-693** features Lightning Recovery, immediately disconnecting the back outlets, and then self-resetting. Model **64-694** features 6900 Joules, full accessory protection, and full color-coding.

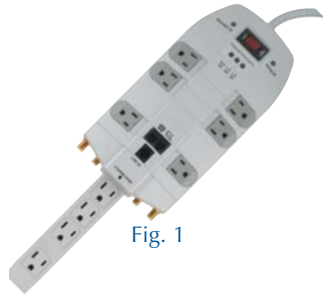


Fig. 1




Fig. 2



Fig. 3



Fig. 4



Fig. 5



Fig. 6

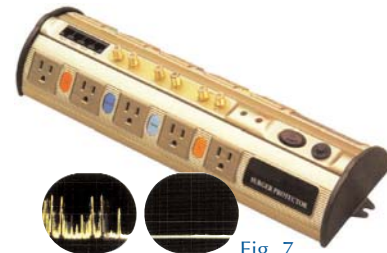


Fig. 7

### D-C-T\* Surge Protection

Retail Part Number	Figure Number	Number Of Outlets	Description	Cord Specs	Color	15 amp Breaker	D-DSS Coax Tele*	Max Joules
64-670	1	10	Home Ent. System Surge	6' - 14/3	Gray	Y	D, C, T-160 J	1665 J
64-830	2	5	Surge EMI/RFI Strip	4' - 14/3	Ivory	Y	C-46 J	200 J

### T-F-M-C-S-A\* Surge Protection

Retail Part No.	Figure No.	Description	No. of Outlets	T-F-M* Protection	Coaxial* Protection	Maximum Joules
64-843	3	Home Entertainment Surge Protection, Swivel Outlets—up to 90°	6	T, M	Yes	1960 J
64-687	4	Home Entertainment Surge Protection with Color Coded Line Cord Labels, Ideal for Corners	8	T, F, M	C, S, A	8000 J
64-694	5	Home Entertainment Surge Protection with Color Coded Line Cord Labels	10	T, F, M	C, S, A	6900 J
64-693	6	Home Entertainment Surge Protection with Color Coded Line Cord Labels, Auto Recovery Function	10	T, F, M	C, S, A	7500 J
64-692	7	Home Entertainment Surge Protection with Color Coded Line Cord Labels, Noise Filtering Circuitry	10	T, F, M	C, S, A	3000 J

\*Key to Protection: D=Digital, C=Coaxial Cable, T=Telephone, F=Fax, M=Modem, S=Satellite, A=Antenna